




Orange Pi PC Plus User Manual



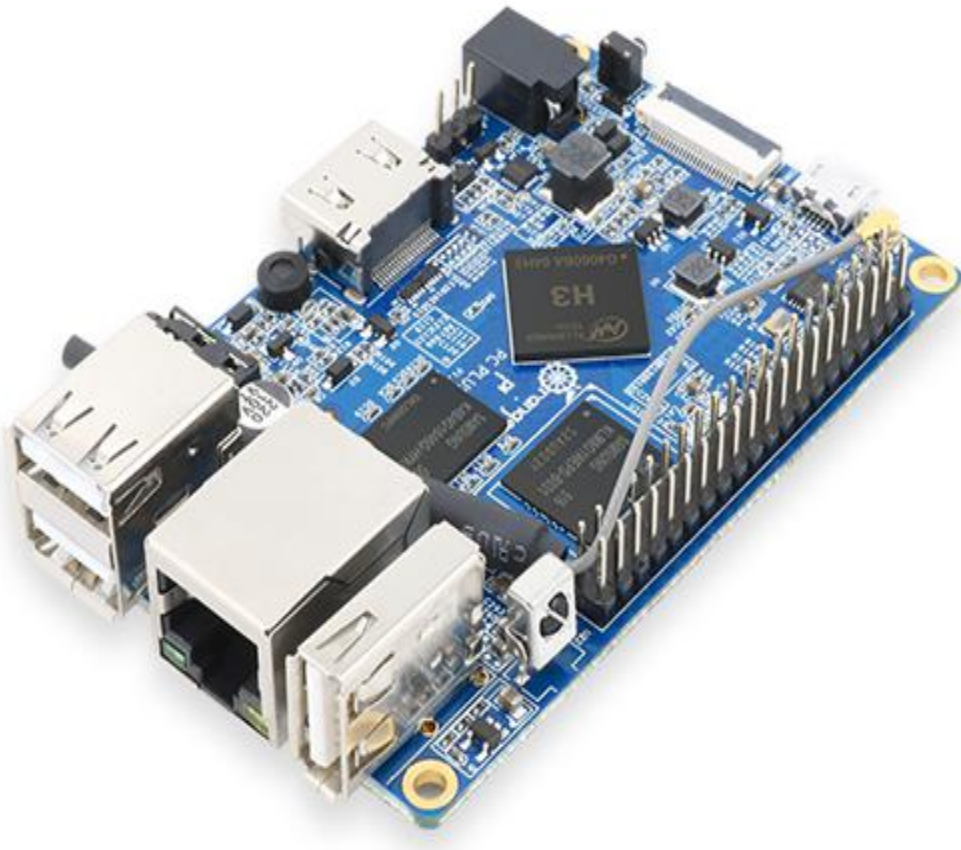

Contents

I. Orange Pi Introduction.....	1
1. What is Orange Pi PC Plus?.....	1
2. What can I do with Orange Pi PC Plus?.....	1
3. Whom is it for?.....	1
4. Hardware specification of Orange Pi PC Plus.....	1
5. GPIO Specifications.....	4
6. Specification of CSI Camera Connector.....	6
II. Using Method Introduction.....	7
1. Step 1: Prepare Accessories Needed.....	7
2. Step 2: Prepare a TF Card or EMMC Image.....	8
3. Step 3: Boot your Orange Pi.....	16
4. Step 4: Turn off your Orange Pi correctly.....	18
5. Other configuration.....	19
6. Universal software configuration.....	21
III. Linux Kernel Source Code Compilation.....	35
1. Download Linux Source Code.....	35
2. Compile Project Source Code.....	36
3. Update the Kernel Image File and Replace Library.....	38
IV. Android Kernel Source Code Compilation.....	41
1. Install JDK.....	42
2. Install Platform Supported Software.....	42
3. Download Android Source Package.....	42
4. Install Compiler Tool Chain.....	43
5. Compile Lichee Source Code.....	43
6. Compile Command of Android Code.....	44
V. Use Project Configuration Files.....	45
1. sys_config.fex Introduction.....	45
2. Update Uboot and boot.....	45
3. Examples.....	46
VI. OrangePi Driver development.....	49
1. Device Driver and Application Programming.....	49
2. Compile device driver.....	52
3. Cross compiler Application Program.....	55
4. Running Driver and Application.....	57
VII. Using Debug tools on OrangePi.....	58
1. Operation Steps on Windows.....	58
2. Operation Steps on Linux.....	62



I. Orange Pi Introduction

1. What is Orange Pi PC Plus?

It's an open-source single-board computer. It can run Android 4.4, Ubuntu, Debian, Raspberry Pi Image, it uses the AllWinner H3SoC, and has 1GB DDR3 SDRAM.

2. What can I do with Orange Pi PC Plus?

You can use it to build...

- A computer
- A wireless server
- Games
- Music and sounds
- HD video
- A speaker
- Android
- Scratch
-

Pretty much anything else, because Orange Pi PC Plus is open source

3. Whom is it for?

Orange Pi PC Plus is for anyone who wants to create with technology—not just consuming. It's a simple, fun, useful tool and you can use it to take control of the world around you.

4. Hardware specification of Orange Pi PC Plus


Hardware specification	
CPU	H3 Quad-core Cortex-A7 H.265/HEVC 4K
GPU	Mali400MP2 GPU @600MHz Supports OpenGL ES 2.0
Memory (SDRAM)	1GB DDR3 (shared with GPU)




On-board Storage	TF card (Max. 32GB) /eMMC flash(8GB)
On-board Network	10/100M Ethernet RJ45, on-board WIFI network
Video Input	A CSI input connector Camera: Supports 8-bit YUV422 CMOS sensor interface Supports CCIR656 protocol for NTSC and PAL Supports SM pixel camera sensor Supports video capture solution up to 1080p@30fps
Audio Input	MIC
Video Outputs	Supports HDMI output with HDCP Supports HDMI CEC Supports HDMI 30 function Integrated CVBS Supports simultaneous output of HDMI and CVBS
Audio Output	HDMI
Power Source	DC input, USB OTG input don't supply power
USB 2.0 Ports	Four USB 2.0 Host, one USB 2.0 OTG
Low-level peripherals	40 Pins Header, compatible with Raspberry Pi B+
GPIO(1x3) pin	UART, ground.
LED	Power led & Status led
Key	IR Input, Power
Supported OS	Android Lubuntu, Debian, Raspberry Pi Image
Interface definition	
Product size	85mm × 56mm
Weight	60g
Orange Pi™ is a trademark of the Shenzhen Xunlong Software CO., Limited	



Top view

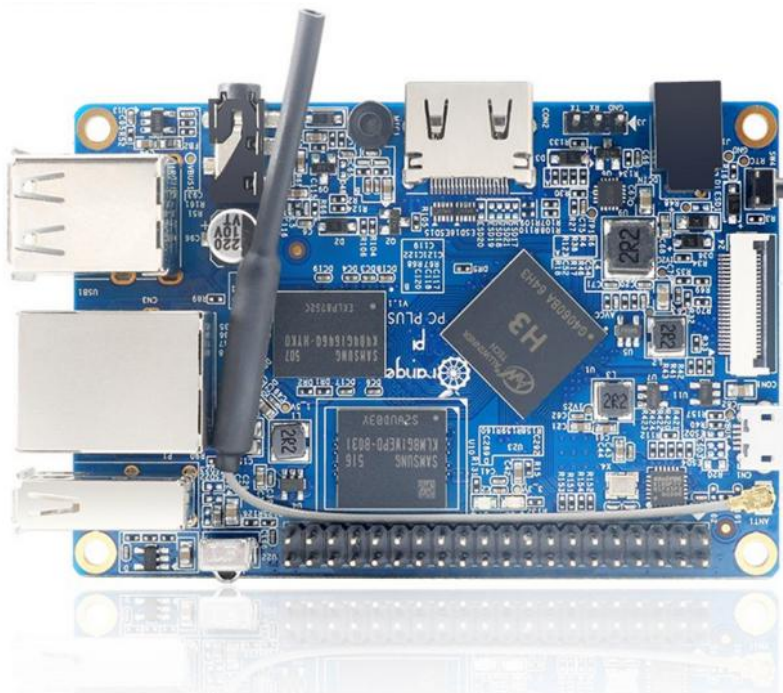


Bottom view

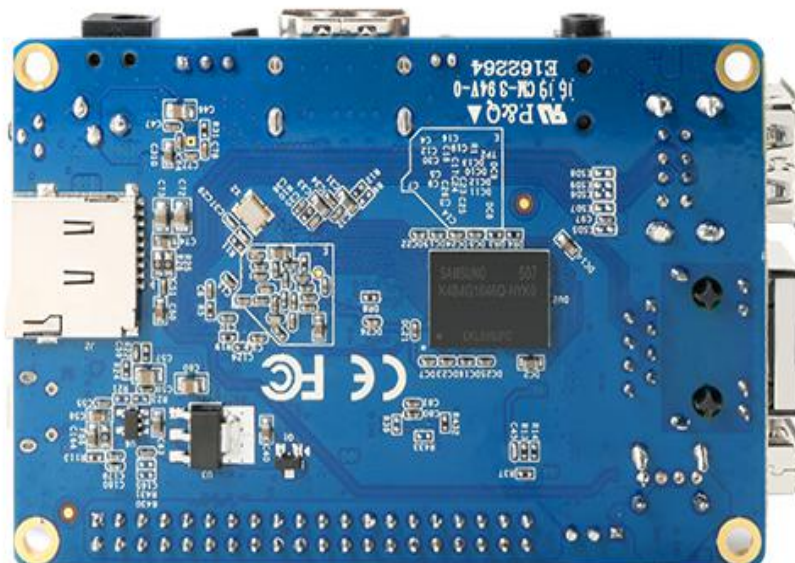




Interface instructions

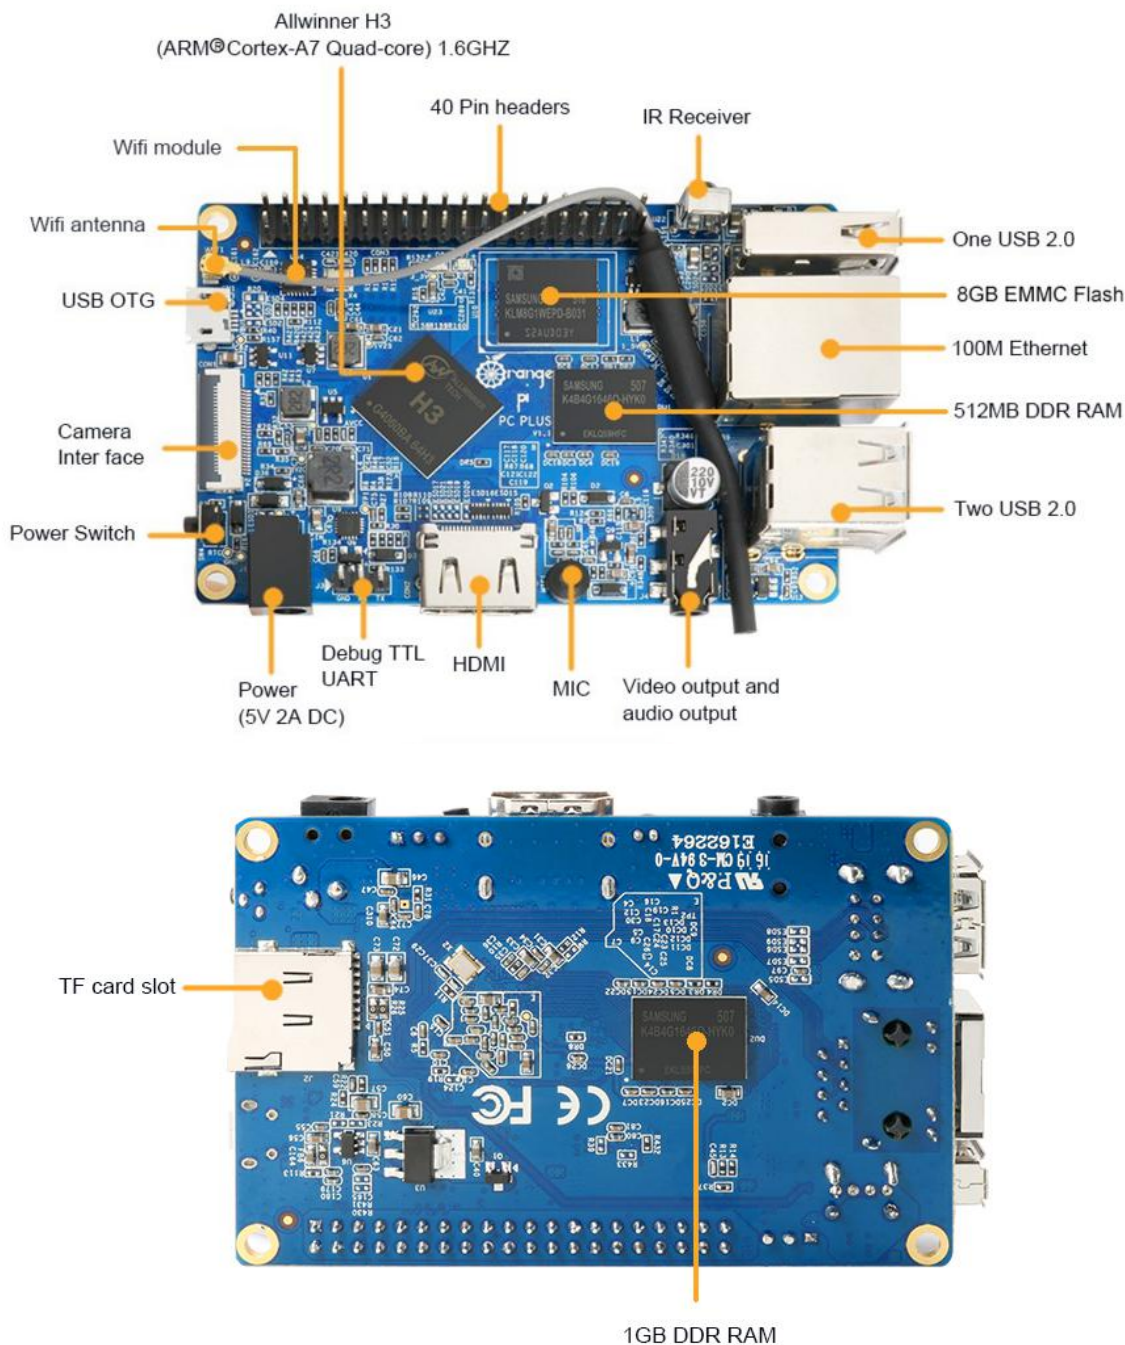

5. GPIO Specifications

A 40-pin GPIO interface on the Orange Pi PC Plus is the same as Model A and Model B of Raspberry Pi. The picture below is GPIO pin define of Orange Pi PC Plus.

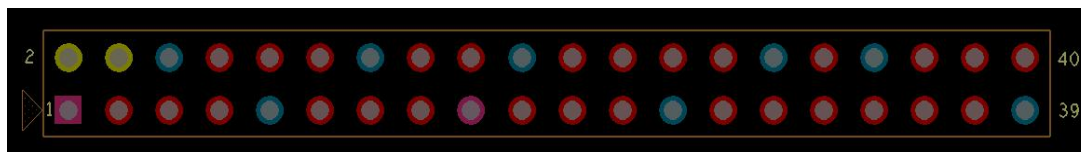


OrangePi(H3)		
CON3-P01	VCC-3V3	
CON3-P02	VCC-5V	
CON3-P03	TWI0-SDA	PA12
CON3-P04	VCC-5V	
CON3-P05	TWI0-SCK	PA11
CON3-P06	GND	
CON3-P07	PWM1	PA6
CON3-P08	UART3_TX	PA13
CON3-P09	GND	
CON3-P10	UART3_RX	PA14
CON3-P11	UART2_RX	PA1
CON3-P12	PD14	PD14
CON3-P13	UART2_TX	PA2
CON3-P14	GND	
CON3-P15	UART2_CTS	PA3
CON3-P16	PC4	PC4
CON3-P17	VCC-3V3	
CON3-P18	CAN_RX	PC7
CON3-P19	SPI0_MOSI	PC0
CON3-P20	GND	
CON3-P21	SPI0_MISO	PC1
CON3-P22	UART2_RTS	PA2
CON3-P23	SPI0_CLK	PC Plus
CON3-P24	SPI0_CS0	PC3
CON3-P25	GND	
CON3-P26	PA21	PA21
CON3-P27	TWI1-SDA	PA19
CON3-P28	TWI1-SCK	PA18
CON3-P29	PA7	PA7
CON3-P30	GND	
CON3-P31	PA8	PA8
CON3-P32	UART1_RTS	PG8
CON3-P33	PA9	PA9
CON3-P34	GND	
CON3-P35	PA10	PA10
CON3-P36	UART1_CTS	PG9
CON3-P37	PA20	PA20
CON3-P38	UART1_TX	PG6
CON3-P39	GND	
CON3-P40	UART1_RX	PG7



6. Specification of CSI Camera Connector

The CSI Camera Connector is a 24-pin FPC connector which can connect external camera module with proper signal pin mappings. The pin of CIS connector can be defined as follows. The connector marked with "CON 1" on the Orange Pi PC Plus is camera connector.

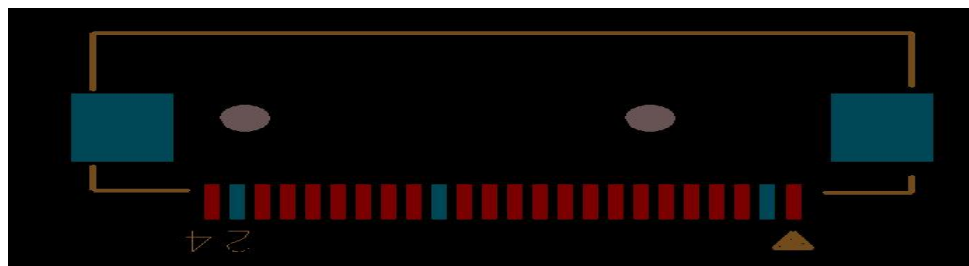

Orange Pi PC Plus-CSI

CON1-P01	NC	
CON1-P02	GND	
CON1-P03	TWI2-SDA	PE13
CON1-P04	VCC-CSI	
CON1-P05	TWI2-SCK	PE12
CON1-P06	CSI-RESET#	PE15
CON1-P07	CSI-VSYNC	PE3
CON1-P08	CSI-STBY-EN	PE15
CON1-P09	CSI-HSYNC	PE2
CON1-P10	VDD1V8-CSI	
CON1-P11	VCC-CSI	
CON1-P12	CSI-D7	PE11
CON1-P13	CSI-MCLK	PE1
CON1-P14	CSI-D6	PE10
CON1-P15	GND	
CON1-P16	CSI-D5	PE9
CON1-P17	CSI-PCLK	PE0
CON1-P18	CSI-D4	PE8
CON1-P19	CSI-D0	PE4
CON1-P20	CSI-D3	PE7
CON1-P21	CSI-D1	PE5
CON1-P22	CSI-D2	PE6
CON1-P23	GND	
CON1-P24	AFVCC-CSI	



II. Using Method Introduction

Follow these steps, you can configure and run your Orange Pi in a very short period of time. Boot your Orange Pi need to complete the following steps.

1. Step 1: Prepare Accessories Needed

You need at least some accessories like the following if it is your first time to use the Orange Pi.

No.	Items	Requirements and Instructions
1	TF card	8GB min.; class 10. Branded TF cards would be reference which are much more reliable.
2	HDMI to HDMI cable or HDMI to DVI cable	HDMI to HDMI cable is used to connect HD TV or HD monitor
3	AV video cable	You could use AV cable to connect stimulated monitor if HDMI monitor is unavailable.
4	Keyboard and mouse	You could use keyboard and mouse with USB por; keyboard and mouse are high-power, so a USB concentrator is required.
5	Ethernet cable/(Optional)	Network is optional, it makes more convenient to mount and upgrade software in your Orange Pi.
6	DC power adapter	5V/2V min. high qualified power adapter, OTG can not use a power supply.
7	Audio cable (Optional)	You can select an audio cable with 3.5mm jack to feel stereo audio.



HDMI to HDMI cable



HDMI to DVI cable



AV video cable



TF card



DC power adapter

2. Step 2: Prepare a TF Card or EMMC Image

In order to use Orange Pi normally, you must install the operating system into TF card first.

1) Write Linux into TF Card Based on Windows Platform

- a. Inserting the TF card into the computer, the capacity of the card must be bigger than the operating system, usually requires 8GB or bigger.
- b. Formatting the TF card.


- i Download tools for formatting TF card, such as TF Formatter, it could be downloaded from:

https://www.sdcard.org/downloads/formatter_4/eula_windows/


- ii Unzip the downloaded files, and run *setup.exe*

- iii In the *options settings* select the "format" button for quick formatting. "Format size adjustment" select "(ON)"



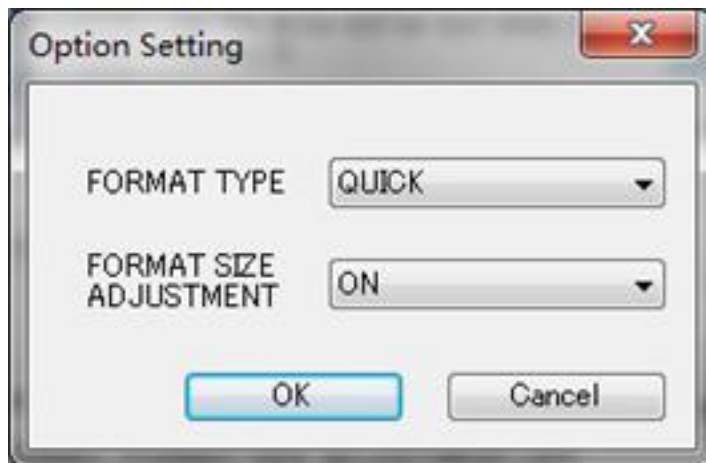

- iv Make sure the inserted TF card disk are in accordance with the chosen disk.
- v Click the "*Format*" button.
- c. Download the operating system image file from the download page, the page address is as following:
<http://www.orangepi.org/downloadresources>
- d. Unzip the downloaded file (in addition to the Android system, this method can be used to burn to write, the Android system need another burn, the following will introduce)
- e. Right click to download the file, select "*Unzip file*" to write image to TF card
 - i Download tools to write image,such as *Win32 Diskimager*, here is the download page:
<http://sourceforge.net/projects/win32diskimager/files/Archive/>
 - ii Select the image file path that has been unzipped.

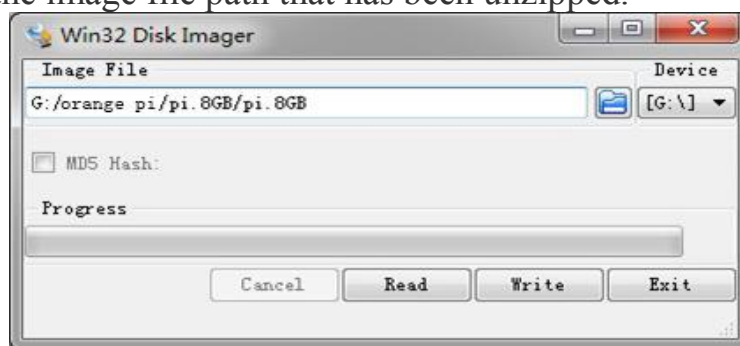

- iii Click "*Write*" button and wait for the image to write.
- iv After the image is written, click "*Exit*" button.

2) Write Linux into TF card based on Linux platform?




- a. Inserting the TF card into the computer, the capacity of the card must be larger than the operating system image, usually requires 4GB or greater capacity.
- b. Formatting the TF card.
 - i Run ***fdisk -l*** order to make sure TF disk.
 - ii Run ***umount /dev/sdxx*** to uninstall all partitions of TF Card.
 - iii Run ***sudo fdisk /dev/sdx*** order. Use ***o*** command to delete all partitions of TF Card, and then us ***n*** order to add a new partition, finally use ***w*** command to save and exit.
 - iv Run ***sudo mkfs.vfat /dev/sdx1*** command to format the TF card partition set up last step to FAT32 form(according to your TF card disk to replace***x***). Or you could skip this step since command in Linux will format TF card automatic.
- c. Download the OS image from download page
<http://www.orangepi.org/downloadresources>
- d. Unzip and right click the downloaded file, select "*Unzip file*"
- e. Write image to TF card
 - i Run ***sudo fdisk -l*** order to make sure the TF card disk
 - ii make sure the image file **hash key** is the same as download page mention(optional). It will output ***sha1sum [path]/[imagename]***, which should be same as the image paye "*SHA-1*"
 - iii Run ***umount /dev/sdxx*** order to uninstall all partitions in TF Card
 - iv Run ***sudo dd bs=4M if=[path]/[imagename] of=/dev/sdx*** to write down image file. Wait for the image to write. If it cannot work at 4M, then replace a 1M which takes more time. You can run ***sudo pkill -USR1 -n -x dd*** order to monitoring procedure.

3) Use PhoenixCard tool to write Android image into TF card


It is impossible for Android image to be written into TF card by using *dd* command under Linux or using *Win32 Diskimager* under Windows. Here PhoenixCard tool is applicable for Android image writing.




- a. Download the Android OS image and **PhoenixCard** tool.
Download **PhoenixCard** from here:
https://drive.google.com/file/d/0B_VynIqhAcB7NTg2UkRDdHRWX2s/edit?usp=sharing
Download Android OS image from here:
<http://www.orangepi.org/downloadresources/>
- b. Format the TF card

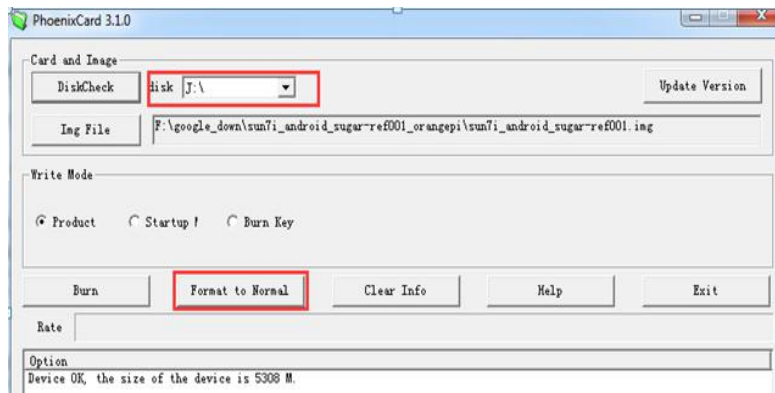


- c. Please make sure the inserted TF card is in accordance with the chosen TF card, click "*restore*" button for TF card formatting.

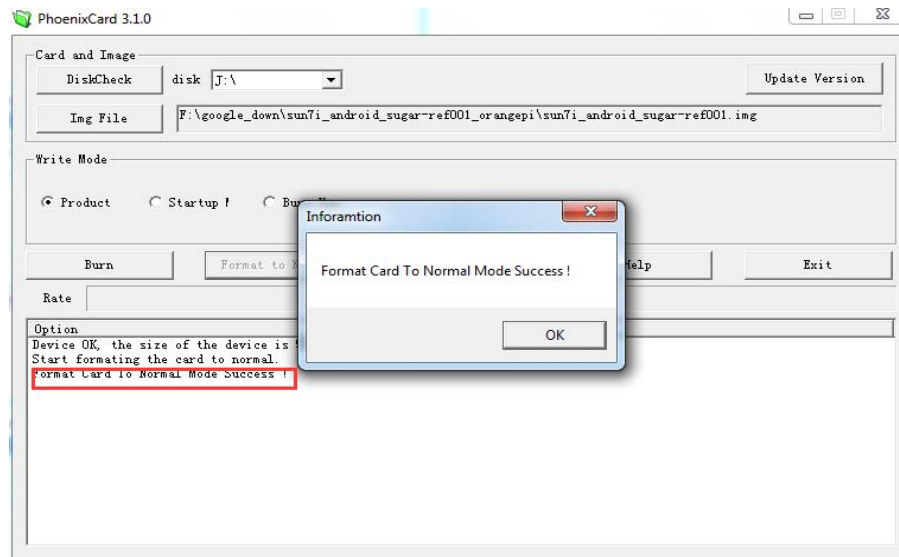

- d. Click "*OK*" button after successfully formatted the TF card to normal.
- e. Burn the Android OS image into your TF card. Please pay attention to the following with red marks.

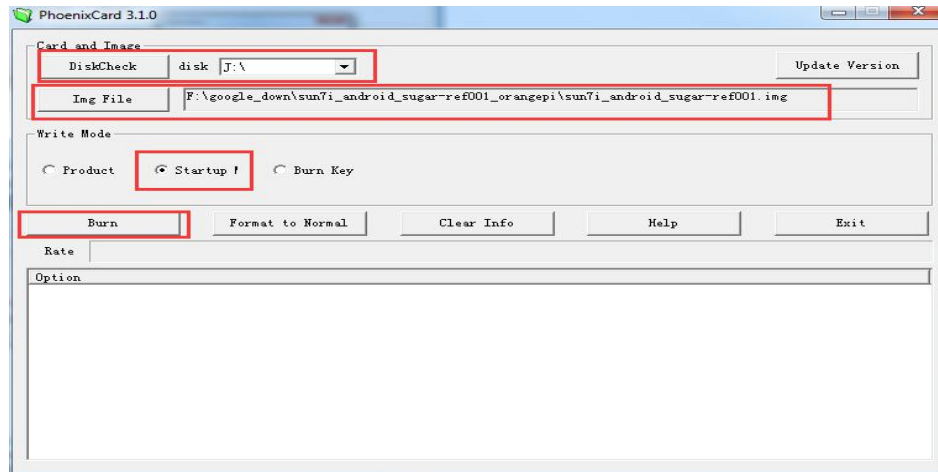

f. Click "Burn" button for writing to TF card and wait for it finish

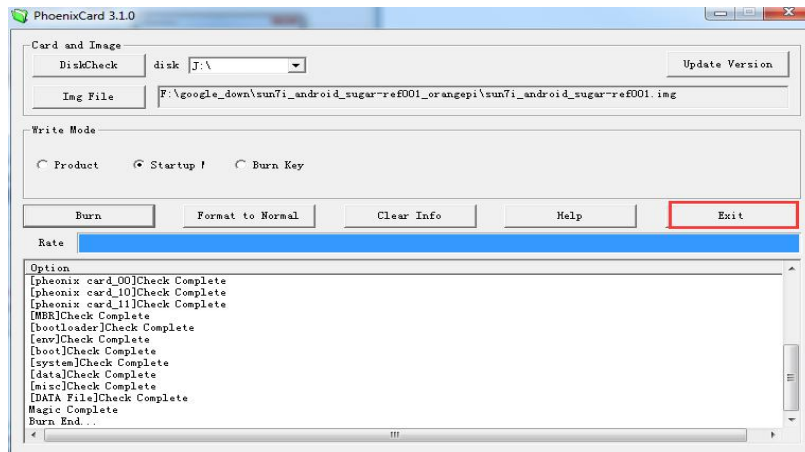

g. Click "Exit" button after burn Android image to TF card successfully.

4) Write Armbian Image into TF Card

a. Insert TF card into computer, please note that the TF card capacity must bigger than the operating system image, usually need to be 8GB or bigger.

b. Download the OS image file from the download page:

<http://www.armbian.com/download/>

c. Write the image into TF card.

i Download image writing tool such as Rufus, the download page:

<https://rufus.akeo.ie/>



ii Select the image file path that has been unzipped



iii Click "start" button and wait for the image to write.

iv After the image is written, click "close" button


5) Write Android image into EMMC

Steps for writing image into EMMC is almost the same with writing into TF card.

- a. Download corresponding Android image and Phoenix Card writing tool.
- b. Formatting SD card.
- c. Make sure the Disk is same as TF card, and start formatting SD card.
- d. Write Android into TF card, please note the red mark, which is different



from writing into TF card.

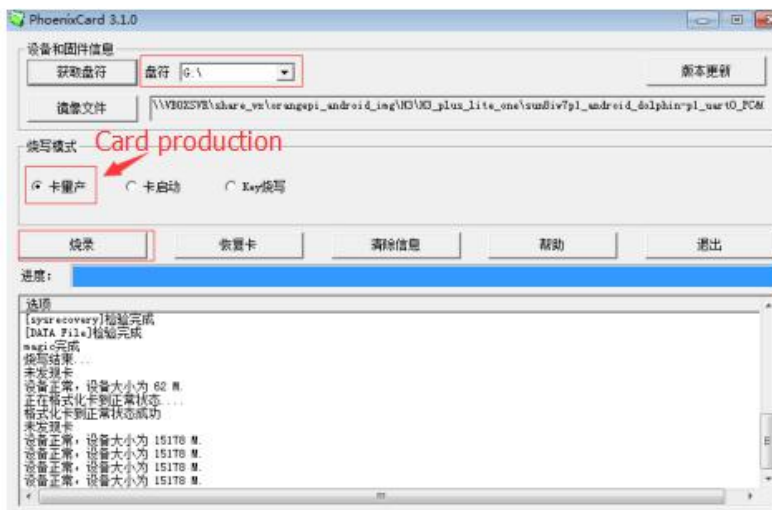

After written image with Card production, then exit.

- e. Power it on, you could found that the red LED on board is flashing which means the image is writing. When the red LED off, image written finished. Take off the TF card, then power the board on, it should run.

6) Write Linux image into EMMC

It is same of H3 serial for image writing into EMMC. In this charter would take pc plus as an example to illustrate which just need to install_to_emmc.

- a. Official website image

```
$ sudo install_to_emmc
```

Enter Y to make sure data in emmc has been erased

```
root@OrangePI:~# install_to_emmc
Thu Feb 11 16:29:30 UTC 2016
=====
Installing Linux system to emmc
=====
WARNING: EMMC WILL BE ERASED !, Continue (y/N)? y
Erasing EMMC ...
```

After finished writing into EMMC, take SD card off and it will boot from EMMC.



```

Installing u-boot to EMMC ...

Mounting EMMC partitions...
FAT partitions mounted to /tmp/_fatdir
linux partition mounted to /tmp/_extdir

Copying file system to EMMC ...


  Creating "fstab"

*****
Linux system installed to EMMC.
*****

```

b. Armbian image


\$ sudo nand-sata-install

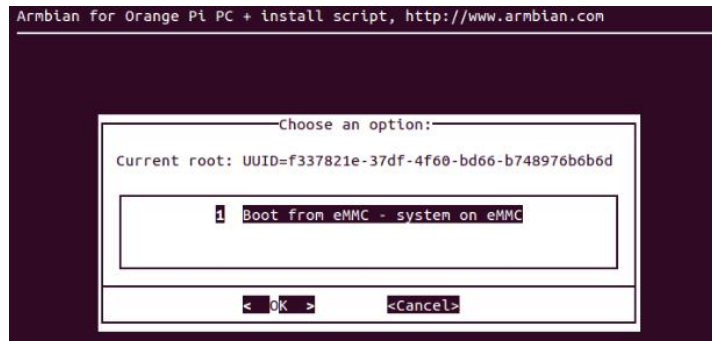


Select OK




Select EXT4 as the format of the image

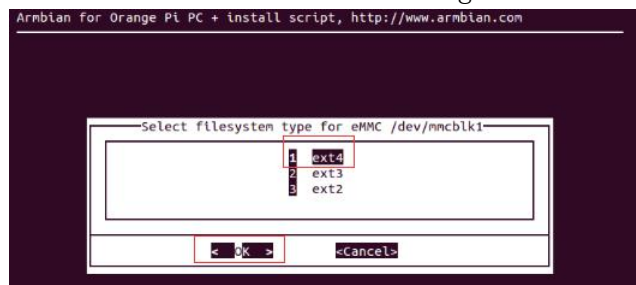

Formatting partition

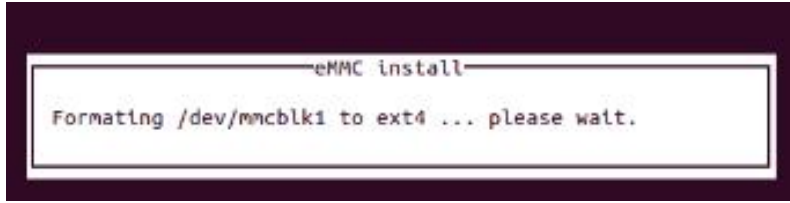

Wait image writing to EMMC.

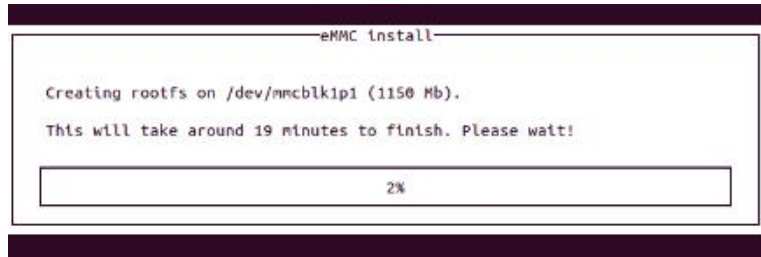

3. Step 3: Boot your Orange Pi

1) Hardware Connection Sketch Map



Orange Pi PC Plus runs on Android 4.4 system



Orange Pi PC Plus runs on Debian system



Orange Pi PC Plus runs on Ubuntu system





2) Details of Booting Steps

- a. Insert the TF card with written image in to the TF card slot on the left edge of the bottom of Orange Pi.
- b. You could use HDMI cable to connect your Orange Pi to HDMI TV or monitor.

You could also use AV interface and audio interface to connect output video and audio to analog TV or display.

- c. Insert USB keyboard and mouse into the right edge of the USB interface.
- d. It is the network port in the middle of 3USB interfaces, which you can access Orange Pi to the wired network.
- e. It is the power input interface on the right side for connecting a 5V and at least 2A or bigger than 2A power adapter. Avoid using smaller power GSM mobile phone charger, it is not able to output 2A even if it marked "2A 5V".

Note: Micro-USB(OTG)cannot use as power input which may cause the fail boot of the OrangePi. Only the power interface could input power.

The Orange Pi will boot in a few minutes If the above steps are successful. There will be graphical interface in he monitor. It may take a long time to start the first time, please wait patiently. The next time will boot very fast.

4. Step 4: Turn off your Orange Pi Correctly

- You can use the shutdown button on the interface to safety close the Orange Pi.
- You can also close the system by entering commands in the shell:

sudo halt

or

sudo shutdown -h

It will be safety to turn off the Orange Pi. If directly use the power button to shut down the system may damage the file system on TF Card. After the system is closed, the power can be cut off by more than 5 seconds' press.



5. Other configuration

1) Connect to the wired network

If Orange pi has already connected to wire cable before powered on, then the system would get the IP address automatically. If it has not connected to wire cable or other problem of network, then it will fail to get the IP address. The system would take some time to load but it has no influence for the board running.

It should be green LED light on and yellow LED flash. You need to make sure the image you wrote is accordingly to the board you use, since there are some board that is Megabit and some are Gigabit which could not be used mixed .

Megabit is using internal phy, here is the configuration:

2 indicates internal phy

```
[gmac0]
gmac_used           = 2
;gmac_rxd3          = port:PD00<2><default><3><default>
;gmac_rxd2          = port:PD01<2><default><3><default>
;gmac_rxd1          = port:PD02<2><default><3><default>
```

Gigabit is using external phy, here is the configuration:

1 indicates external phy

```
[gmac0]
gmac_used           = 1
gmac_rxd3          = port:PD00<2><default><3><default>
gmac_rxd2          = port:PD01<2><default><3><default>
gmac_rxd1          = port:PD02<2><default><3><default>
gmac_rxd0          = port:PD03<2><default><3><default>
gmac_rxclk         = port:PD04<2><default><3><default>
gmac_rxdv          = port:PD05<2><default><3><default>
```

It is defaulted configured, you could take that as reference.

2) Login via vnc and ssh

If there is no condition for connecting HDMI, you could enter the system via vnc or ssh remote login.

- Login via serial port and install ssh
apt-get install ssh
- Modify ssh configuration file /etc/ssh/sshd_config



```
# Logging
SyslogFacility AUTH
LogLevel INFO

# Authentication:
LoginGraceTime 120
PermitRootLogin yes
StrictModes yes

RSAAuthentication yes
PubkeyAuthentication yes
#AuthorizedKeysFile %h/.ssh/authoriz

# Don't read the user's ~/.rhosts and
IgnoreRhosts yes
# For this to work you will also need
RhostsRSAAuthentication no
# similar for protocol version 2
HostbasedAuthentication no
# Uncomment if you don't trust ~/.ssh/
#IgnoreUserKnownHosts yes

# To enable empty passwords, change to
PermitEmptyPasswords no

# Change to yes to enable challenge-response
# authentication (not supported by all
# some PAM modules and threads)
ChallengeResponseAuthentication no
```

- Check the IP with ifconfig, login via ssh of root user

```
curry@curry:~$ ssh root@192.168.1.178
root@192.168.1.178's password:
Welcome to Ubuntu 15.10 (GNU/Linux 3.4.39-02-lobo armv7l)

 * Documentation:  https://help.ubuntu.com/
Last login: Tue Apr 11 15:20:33 2017 from 192.168.1.111
root@OrangePI [10:03:27 AM] [~]
-> #
```

3) HDMI or 3.5mm Sound Output

- The sound was default to output via HDMI on image, it could check and change via alsamixer.

ls /etc/asound.conf

card indicates card number, device indicates device number.

aplay -l it could check the system to load the sound card number and details

cat /proc/asound/cards it also could check the sound card and details

It could be used after use alsamixer to change the sound card.

alsactl store -f /var/lib/alsa/asound.state used for saving modified parameters

- It needs to modify configuration on file system for output on 3.5mm of /etc/asound.conf, modify card1 into card0, or use amixer to modify. The default one is configured, or you could use player on graphical interface to switch via sound channel selection.

- How to use mic sound recording

arecord -d 5 -f cd -t wav 123.wav



After recording, use the following to play
aplay 123.wav

4) Test GPU

After boot the board, login on hami interface and open terminal. Execute the following command:

```
glmark2-es2
```

You could see the test result of mali400.

6. Universal Software Configuration

1) Default Account Changing

The default log in account is orangepi. In order to secure, it is recommended to modify the default orangepi accounts to your own account, for example Zhangsan. Steps are as follows:

- a. Use root account to login Orange Pi (please note that do not login with the account of orangepi)
- b. `$ usermod -l zhangsan orangepi` Change orangepi account into Zhangsan

```
@orangepi:~$ usermod -l zhangsan orangepi
```

- c. `$ groupmod -n zhangsan orangepi` Change group

```
@orangepi:~$ groupmod -n zhangsan orangepi
```

- d. `$ mv /home/orangepi /home/zhangsan` Change directory of original orangepi

```
@orangepi:~$ mv /home/orangepi /home/zhangsan
```

- e. `$ usermod -d /home/orangepi orangepi` Set this directory to orangepi user's home directory

```
@orangepi:~$ usermod -d /home/zhangsan zhangsan
```

- f. `$ cat /etc/passwd` It should be shown as below:

```
pulse:x:112:121:PulseAudio daemon,,,:/var/run/pulse:/bin/false
zhangsan:x:1001:1001:orangepi,,,:/home/zhangsan:/bin/bash
```

After the modification of the above items, it can be used the new account Zhangsan to land.

2) U Disk Automatic Mounted Configuration



- a. `sudo apt-get install usbmount`
- b. `sudo vim /etc/udev/rules.d/automount.rules`
`ACTION=="add",KERNEL=="sdb*", RUN+="/usr/bin/pmount --sync --umask 000 %k"`
`ACTION=="remove", KERNEL=="sdb*", RUN+="/usr/bin/pumount %k"`
`ACTION=="add",KERNEL=="sdc*", RUN+="/usr/bin/pmount --sync --umask 000 %k"`
`ACTION=="remove", KERNEL=="sdc*", RUN+="/usr/bin/pumount %k"`

- c. `udevadm control --reload-rules`

It could refer to this:

<http://unix.stackexchange.com/questions/134797/how-to-automatically-mount-an-usb-device-on-plugin-time-on-an-already-running-sy>

3) System Source Configuration

Take Ubuntu as an example:

- a. Open the source file
`$ sudo vi /etc/apt/sources.list`

```
root@curry: /home/curry# vim /etc/apt/sources.list
root@curry: /home/curry#
```

- b. Edit source file

Replace the source file with your favorite source. Take an example of Ubuntu 16.04 on Zhonkeda source:

```
deb http://mirrors.ustc.edu.cn/ubuntu-ports/ xenial main
multiverse restricted universe
deb http://mirrors.ustc.edu.cn/ubuntu-ports/ xenial-backports
main multiverse restricted universe
deb http://mirrors.ustc.edu.cn/ubuntu-ports/ xenial-proposed
main multiverse restricted universe
deb http://mirrors.ustc.edu.cn/ubuntu-ports/ xenial-security main
multiverse restricted universe
deb http://mirrors.ustc.edu.cn/ubuntu-ports/ xenial-updates main
multiverse restricted universe
deb-src http://mirrors.ustc.edu.cn/ubuntu-ports/ xenial main
multiverse restricted universe
deb-src http://mirrors.ustc.edu.cn/ubuntu-ports/ xenial-backports
main multiverse restricted universe
```




```
deb-src http://mirrors.ustc.edu.cn/ubuntu-ports/ xenial-proposed
main multiverse restricted universe
deb-src http://mirrors.ustc.edu.cn/ubuntu-ports/ xenial-security
main multiverse restricted universe
deb-src http://mirrors.ustc.edu.cn/ubuntu-ports/ xenial-updates
main multiverse restricted universe
```

Note: xenial is the version of the code name in this source, if the other version of Ubuntu needs to replace the corresponding version code which can be found on the internet.

4) Remote desktop installation

There are a lot of software, such as VNG, XRDP, X2GO, etc. For X2GO, it has more functions, and desktop color restore is very good which does not need too much configuration. And XRDP is much more safety than VNC.

- a. `$sudo apt-get install tightvncserver` Install VNC

```
apt-get install tightvncserver
```

- b. `vncpasswd` Set the password: do not execute this command but executing `vncserver` directly. It will prompt you to enter the password twice, when prompted whether can be read only to select the *N*.

```
root@curry:/home/curry/tools/minidlna/minidlna-1.1.0# vncpasswd
Using password file /root/.vnc/passwd
VNC directory /root/.vnc does not exist, creating.
Password:
Verify:
```

- c. Open one or more of desktops by `vncserver` or `vncserver:1(vncserver:2)`... you can also transfer more parameters through the full command as below:

```
vncserver :1 -geometry 1024x768 -depth 16 -pixelformat rgb565
```

(Note: If it prompted you that cannot find the file or other error when installing, please run `sudo apt-get update` to update the software source and try installing again.)

5) NAS and DLAN Configuration

- a. NAS:

There are many files could be reference from Internet, for example: <http://www.geekfan.net/5003/>, it detailed descriptions on the operation and the mounted of U disk is very useful.

- b. DLNA:



Mainly through the minidlna software to achieve the sharing of media resources within the LAN, such as sharing video, music, etc.. The installation steps are as follows:

- i sudo apt-get minidlna
- ii Execute the following command to modify the configuration file:
sudo nano /etc/minidlna.conf

Note: you can also use other text editor to modify.

- iii Add the following:
media_dir=A,/nas, path: /DLNA/Music
media_dir=V,/nas, path: /DLNA/Video
media_dir=P,/nas, path: DLNA/Picture
db_dir=/nas, path: /DLNA/log
db_dir=/nas, path: /DLNA/db

ctrl +o and enter, ctrl +x to save and exit.

iv Established above folders respectively, noted that path consistency and assigned to read and write permissions. In order for convenient, it could be Chmod 755, such as sudo Chmod 755 /nas path /DLNA/Music

v Re-start minidlna to take effect the configuration: /etc/init.d/minidlna restart.

Transmit the corresponding file on the computer to the corresponding folder through samba.

Note: It is recommended to download MoliPlayer on the mobile device. The effect is good and no blue light pressure on both Android and IOS.

6) Thunder remote download

a. Go to the Thunder routing forum to download the required installation package first. The link for stable version:

<http://luyou.xunlei.com/thread-12545-1-1.html>.

Download Xware1.0.31_cubieboard zip file.



Note: If you want to try the latest version, you can download the latest test version: <http://luyou.xunlei.com/thread-15167-1-1.htm>.

b. Enter the directory after uploaded the unzip file to OrangePi. It is



recommended to rename the file to xunlei

c. Installation method of version 1.0.31:

- i \$ cd /xxx/xunlei The xxx is the directory of installation xunlei file
- ii \$ chmod 755 portal
- iii \$./portal

```
root@curry:/home/curry/Downloads/xunlei# ls
EmbedThunderManager ETMDaemon portal vod_httpserver
root@curry:/home/curry/Downloads/xunlei# chmod 755 portal
root@curry:/home/curry/Downloads/xunlei#
```

iv You will get an activation code after booting like the following:

```
YOUR CONTROL PORT IS: 9000


starting xunlei service...
etm path: /home/echo/xunlei
execv: /home/echo/xunlei/lib/ETMDaemon.

getting xunlei service info...
Connecting to 127.0.0.1:9000 (127.0.0.1:9000)

THE ACTIVE CODE IS: ██████████ Here you will get
an activation code

go to http://yuancheng.xunlei.com, bind your device with the active code.
finished.
```

v Copy this activation code to <http://yuancheng.xunlei.com> (Which required to log in with account of Thunder). Then click the tab on the top right corner to add, fill in the activation code to complete the binding according to the following figure.

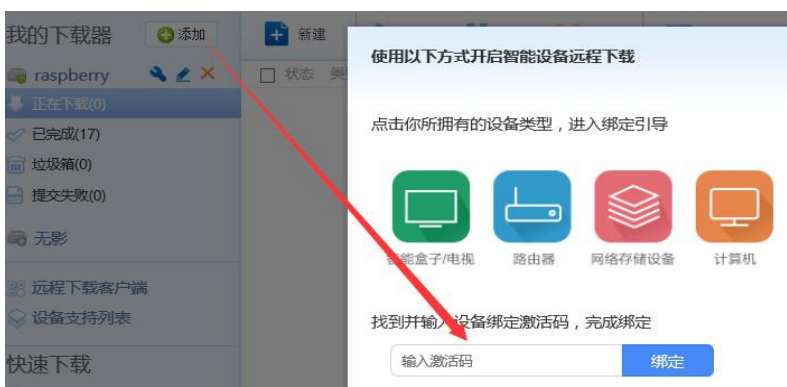

vi Setting start up

- \$ sudo nano /etc/rc.local
- add the following contents before exit 0
- cd /xx/xunlei
- ./portal &
- ctrl +o and enter, ctrl +x to save and exit.

d. Installation of version 3.0.32.253:



- i \$ cd /xxx/xunlei The xxx is the directory of installation file of xunlei
- ii \$ sudo nano thunder_mounts.cfg Modify the download path

```
#仅接受以下列路径开头的挂载路径
available_mounts
{
    /media/SATA
}

#下列目录被认为是分区，并在程序运行期间不变
virtual_mounts
/
```

- iii chmod +x etm_monitor
- iv Run ./etm_monitor, there will be an activation code page like version 1.0.32. And then binding on the Thunder remote page (above steps 4, 5). There might be one or two errors while running, ignore it (selection type of shell and generation of INI file).

- v Setting start up
 - sudo nano /etc/rc.local add the following contents before exit 0
 - cd /xx/xunlei
 - ./etm_monitor &
 - ctrl +o and enter, ctrl +x to save and exit.

It could be remote downloading on computer, mobile phone or tablet by login yuancheng.xunlei.com

7) Modify the size of ext4 file system

After made the written image into SD card for booting, enter into rootfs partition's expansion of file system. It could enhance the performance of SD card to avoid limited storage cause problem.

- Method 1

Extend rootfs file partition of TF card on PC:

Select the specified disk, right click and select the corresponding disk, select "change size" and adjust it into your desired size, click "re-size", close the dialog box and click "apply all operations", select "application" to complete the expansion operation

- Method 2

Enter into the system and extend via shell



Before partition

```
root@OrangePi:~# df -lh
Filesystem      Size  Used Avail Use% Mounted on
/dev/mmcblk0p2  2.0G  565M  1.4G  30% /
devtmpfs        482M   0  482M   0% /dev
tmpfs           490M   0  490M   0% /dev/shm
tmpfs           490M  13M  478M   3% /run
tmpfs           5.0M  4.0K  5.0M   1% /run/lock
tmpfs           490M   0  490M   0% /sys/fs/cgroup
/dev/mmcblk0p1   50M   13M   38M  26% /boot
```

Enter into system and expend via `resize_rootfs.sh`

```
root@OrangePi:/usr/local/sbin# resize_rootfs.sh
+ DEVICE=/dev/mmcblk0
+ PART=2
+ resize
+ fdisk -l /dev/mmcblk0
+ grep /dev/mmcblk0p2
+ awk {print $2}
+ start=143360
+ echo 143360
143360
+ set +e
+ fdisk /dev/mmcblk0

Welcome to fdisk (util-linux 2.27.1).
Changes will remain in memory only, until you decide to write them.
Be careful before using the write command.
```

Enter `resize_rootfs.sh` on command line, the system will expanding automatically,

Reboot the system and use `df -lh` to check whether expanding is successful

```
+ set -e
+ partx -u /dev/mmcblk0
+ resize2fs /dev/mmcblk0p2
resize2fs 1.42.13 (17-May-2015)
Filesystem at /dev/mmcblk0p2 is mounted on /; on-line resizing required
old_desc_blocks = 1, new_desc_blocks = 1
The filesystem on /dev/mmcblk0p2 is now 3871616 (4k) blocks long.
+ echo Done!
Done!
root@OrangePi:/usr/local/sbin# df -lh
Filesystem      Size  Used Avail Use% Mounted on
/dev/mmcblk0p2  15G  566M  14G   4% /
devtmpfs        482M   0  482M   0% /dev
tmpfs           490M   0  490M   0% /dev/shm
tmpfs           490M  13M  478M   3% /run
tmpfs           5.0M  4.0K  5.0M   1% /run/lock
tmpfs           490M   0  490M   0% /sys/fs/cgroup
/dev/mmcblk0p1   50M   13M   38M  26% /boot
```

a. Expand file system

i Boot to Linux, umount `/dev/sdb1` and `/dev/sdb2`, if it prompts disk busy, then use `fuser` to clean the using disk (we will recommend using another Linux booting disk to lead the system).

ii Use `fdisk /dev/sdb` to adjust the partition size, after into it, enter `p`, and keep in mind about the initial position of needed extending size partition.

iii Enter `d` to delete the partition need to change the size (my file system is `/dev/sdb2`, which is the 2 partition).

iv Enter `n` to build a new partition, make sure the initial position is the same as you deleted, and enter the number as you desire.



- v Enter w to save the partition data.
 - vi Use the following command to check the file system(make sure it is a right file system)
`e2fsck -f /dev/sdb2`
 - vii Adjust the partition size
`resize2fs /dev/sdb2`
 - viii It could mount a disk partition, you could check whether it has changed.
- b. Shrink file system
- i Boot to Linux, umount /dev/sdb1 and /dev/sdb2, if it prompts disk busy, then use fuser to clean the using disk(we will recommend using another Linux booting disk to lead the system).
 - ii Use the following command to check the file system(make sure it is a right file system)
`e2fsck -f /dev/sdb2`
 - iii Modify the size of file system(Use `resize2fs`)
`resize2fs /dev/sdb2 900M`

The "s"after the number represents specifying the size of file system via the sectors(every sector calculated by 512 bite). You could also specify it into K(KB), M(MB), G(GB), etc.

- iv Use `fdisk /dev/sdb` to adjust the partition size, after into it, enter p, and keep in mind about the initial position of needed extending size partition. You need to first delete the partition then build a new one because the `fdisk` could not modify the size dynamic(you need to calculate the size, it have to enough to contain the file system adjusted in last step).
- v Enter d to delete the partition need to change the size(my file system is /dev/sdb2, which is the 2 partition).
- vi Enter n to build a new partition, make sure the initial position is the same as you deleted, and enter the number as you desire. Besides, if it is boot-able partition you want to change, note that need to keep the bootable mark in case cannot boot.

The above illustration is using `fdisk` and `resize2fs` to modify partition and file system, you could also use `gparted`. `Gparted` has graphical interface and it could help you to re-size file system at the same time of re-sizing partition. `Goarted` is much easier to use and reduce the change to make mistake. For now our official `Lubuntu` and `Raspbian` could not use it.

8) How to use gc2035 on Linux

- a. Use `find` command to find the location of the following files, and load it



```
according to the specified order
insmod videobuf-core.ko
insmod videobuf-dma-contig.ko
insmod uvcvideo.ko
insmod cci.ko
insmod vfe_os.ko
insmod vfe_subdev.ko
insmod gc2035.ko
insmod vfe_v4l2.ko
```

There should be generated video0 on /dev/ after loaded. After low-level driver install, then the Andoird could be used directory.

b. Use camera in Linux

i Load up driver

```
sudo modprobe gc2035
```

```
sudo modprobe vfe_v4l2
```

ii Install motion

```
sudo apt-get install motion
```

iii Modify configuration

```
sudo nano /etc/motion/motion.conf
```

```
stream_localhost off
```

iv Create folder for images saving

```
mkdir ~/motion
```

v Modify permission

```
chmod 777 motion
```

vi Continue modifying configuration

```
sudo nano /etc/default/motion
```

```
start_motion_daemon=yes
```

vii Boot the server

```
Sudo /etc/init.d/motion start
```

Enter the following in browser: localhost:8081

You could check image output from camera.

Besides, you could also refer to this link:

<http://www.cnx-software.com/2015/09/26/how-to-use-orange-pi-camera-in-linux-with-motion/>

9) eth0 and wlan0 static mac address setting

- a. If the system do not use systemd, you could modify rc.local directory and add the following:



```
$ vim /etc/rc.local
MAC=00:e0:4c:a1:2b:d4
ifconfig wlan0 down
ifconfig wlan0 hw ether $MAC
ifconfig wlan0 up
dhclient &
```

After rebooting, you could use ifconfig to check whether mac address has changed.

- b. If the system used systemd, you also need to add the following besides the above steps:

```
$ cd /etc/systemd/system/
```

\$ vim change_mac_address.service (You could name the server, format just like the following)

```
[unit]
```

```
Description=Change OrangePi Wifi mac address
```

```
[Service]
```

```
ExecStart=/etc/rc.local
```

```
RemainAfterExit=yes
```

```
[Install]
```

```
WantedBy=multi-user.target
```

```
$ systemctl enable change_mac_address.service
```

Modify mac address of eth0 is same as modifying wlan0's, just need to replace wlan0 into eth0.

10) Orange Pi Android root

There is defaulted with root permission on Android pre-installed, but lacking authorization management software. The following is how to add authorization management software.

You need to have UsbModeSwitch.apk and UPDATE-SuperSU-v2.46.zip, install kingroot and make sure OTG on Orange Pi could connect to PC.

- a. Open adb debug mode

Use U disk or card reader to install UsbModeSwitch.apk into Orange Pi OS and open it, tick "enable usb device mode" and use debug cable to



connect OTG port and PC (make sure it is micro usb-cable in case other cables could not be recognized). Normally PC would search and install adb driver software automatically. If PC failed to install, you could install PC version's Peasecod to install the driver software.

- b. After connected Orange PI and PC, open command mode of PC, enter related command of adb(you need to install adb debug command, which Peasecod has adb command). Here is the command:

```
adb remount
adb shell
```

windows(win+r) command line enter into command mode, then enter into kingroot directory and execute the following steps:

```
adb shell
root@rabbit-p1:/ # mkdir /tmp
root@rabbit-p1:/ # cd /system/bin
root@rabbit-p1:/ # mount -o remount, rw /system
root@rabbit-p1:/system/bin # ln -s busybox-smp unzip
```

Logout adb shell Mode

```
root@rabbit-p1:/exit (Or Ctrl + C)
Unzip UPDATE-SuperSU-v2.46.zip
You will obtain META-INF/com/google/android/update-binary and put it
into specific catalog.
adb push /path/UPDATE-SuperSU-v2.46.zip /data/local/tmp    path is file's
path
adb push /path/ update-binary /data/local/tmp
adb shell
root@rabbit-p1:/ #cd /data/local/tmp
root@rabbit-p1:/ #sh update-binary 0 1
/data/local/tmp/UPDATE-SuperSU-v2.46.zip
```

.....
.....

After executed scripts, enter reboot command and reboot it, you could use the device authorization management software normally.

After rebooted, there might be no super administrator icon, you need to delete the desk configuration file and reboot the board.

11) WiringPi installation and usage



a. Install WiringPi

i Install compilation tools for source code compilation

```
$ sudo apt-get install gcc g++ make
```

ii Compile GPIO driver of H3

```
git clone https://github.com/kazukioishi/WiringOP.git -b h3
```

```
cd WiringOP
```

```
chmod +x ./build
```

```
sudo ./build
```

iii GPIO print out information

```
# gpio -v
```

```
gpio version: 2.20
```

Copyright (c) 2012-2014 Gordon Henderson

This is free software with ABSOLUTELY NO WARRANTY.

For details type: gpio -warranty

Banana Pro Details:

Type: Banana Pro, Revision: 1.2, Memory: 1024MB, Maker: LeMaker

iv Display

gpio readall

Orange Pi												
BCM	wPi	Name	Mode	V	Physical	V	Mode	Name	wPi	BCM		
		3.3v			1	2		5v				
12	8	SDA.0	ALT5	0	3	4		5V				
11	9	SCL.0	ALT5	0	5	6		0v				
6	7	GPIO.7	ALT3	0	7	8	0	ALT5	TxD3	15	13	
		0v			9	10	0	ALT5	RxD3	16	14	
1	0	RxD2	ALT5	0	11	12	0	ALT3	GPIO.1	1	110	
0	2	TxD2	ALT5	0	13	14		0v				
3	3	CTS2	ALT5	0	15	16	0	ALT3	GPIO.4	4	68	
		3.3v			17	18	0	ALT3	GPIO.5	5	71	
64	12	MOSI	ALT4	0	19	20		0v				
65	13	MISO	ALT0	0	21	22	0	ALT5	RTS2	6	2	
66	14	SCLK	ALT4	0	23	24	0	ALT4	CEO	10	67	
		0v			25	26	0	ALT3	GPIO.11	11	21	
19	30	SDA.1	ALT4	0	27	28	0	ALT4	SCL.1	31	18	
7	21	GPIO.21	ALT3	0	29	30		0v				
8	22	GPIO.22	ALT3	0	31	32	0	ALT5	RTS1	26	200	
9	23	GPIO.23	ALT3	0	33	34		0v				
10	24	GPIO.24	ALT3	0	35	36	0	ALT5	CTS1	27	201	
20	25	GPIO.25	OUT	1	37	38	0	ALT5	TxD1	28	198	
		0v			39	40	0	ALT5	RxD1	29	199	
BCM	wPi	Name	Mode	V	Physical	V	Mode	Name	wPi	BCM		



12) Configure Network

● Method 1:

- a. Enter following on the command line:

```
$ ifconfig
```

To check whether there is wlan(wlan*)

- b. If no, load corresponding wlan model

```
$ insmod 8189*.ko
```

For example, RTL8189ftv is corresponding to 8189fs.ko, while RTL8189etv is corresponding to 8189es.ko

- c. Enter command ifconfig you should find there is wlan0(Hypothesis it is wlan0)

- d. Configure wireless, first you need to know ssid and psk(account and password), enter corresponding wlan*, ssid, psk

```
$ sudo nano /etc/network/interfaces (add the following contents)
```

```
auto wlan0
```

```
iface wlan0 inet dhcp
```

```
wpa-ssid xxxx
```

```
wpa-psk xxxx
```

- e. Reboot the board and wireless should be available

```
$ sudo reboot
```

● Method 2:

- a. Establish a wifi hotspot configure file wpa_supplication.conf on the directory of /etc/network/ and add the following contents:

```
network={
    ssid="wifi hotspot name"
    psk="wifi hotspot password"
    priority=1
}
```

- b. Connect wifi with the following command:

```
ifconfig wlan0 up
```

```
sudo wpa_supplicant -i wlan0 -c /etc/network/wpa_supplication.conf &
```

```
dhcpcd wlan0 &
```

- c. Test the condition of wifi connection

Use ifconfig command you could check the information of wlan0 and use ping command to test.

13) Use USBwifi of official image

- a. Insert USBwifi and make sure USB is opened. Enter command lsusb to check the detail information of USB

```
$ dmesg
```

```
$ lsusb
```

(Bus 008 Device 002: ID 0bda:8176 Realtek Semiconductor Corp. RTL8188CUS 802.11n WLAN Adapter) id is 8176 and check the driver from internet it is rtl8188cu.



You could find it from the following link:

<https://sites.google.com/site/easylinuxtipsproject/reserve-7#TOC-Realtek-RTL8188CUS-and-RTL8192CU-chipsets-0bda:8176-and-0bda:8178->

1 Determine the chipset

2 Realtek RTL8188CUS and RTL8192CU chipsets (0bda:8176 and 0bda:8178)

Source code compile lib/modules/*/drivers/net/wireless/realtek/ and it will generated into 8192CU.ko

b. Source code in disk

(rtl8188C_8192C_usb_linux_v4.0.2_9000.20130911.tar.gz)

Update the directory of uImage and lib

c. Power it on, and it will load the following module:

rtlwifi.ko,rtl8192c_common.ko,mac80211.ko,rtl8192cu.ko.

d. Uninstall the module of rtl8192cu.ko and install 8192cu.ko, modify /etc/modules and add 8192cu, to make it could boot after power on

e. Modify /etc/network/interfaces, add ssid and psk.

f. Reboot and USBwifi should be available.




III. Linux Kernel Source Code Compilation

In order to support the rapid development of the project, we are writing this sections for project configuration options to the binary file. When the system is running, it can get the information of the system running by reading the binary file, which can greatly simplify the time of project development.

This manual describes how to use the binary file to speed up the development of the project.

Hardware: Orange Pi development board*1, Card reader*1, TF card*1, power supply*1

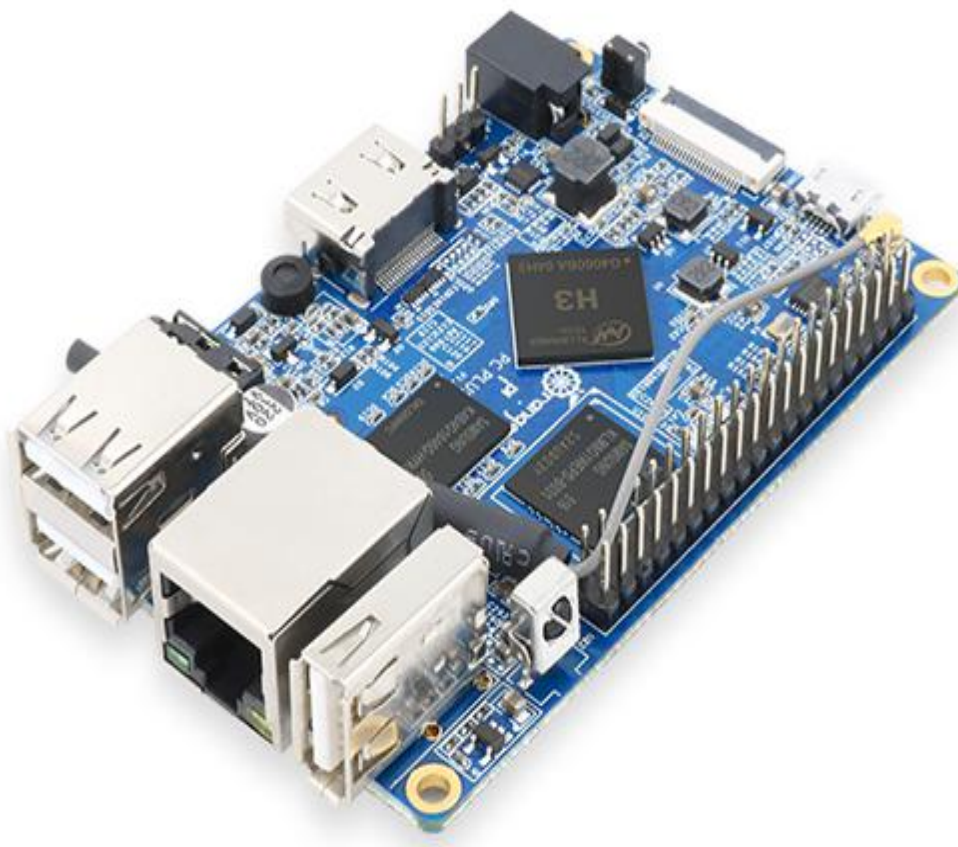


Note: In the following sections, * indicates wild-cards, you need to fill in the actual values according to their file storage path.

1. Download Linux Source Code

You could download the source code from the official website(Source code for H3 chip are the same):



<http://www.orangepi.org/downloadresources/>

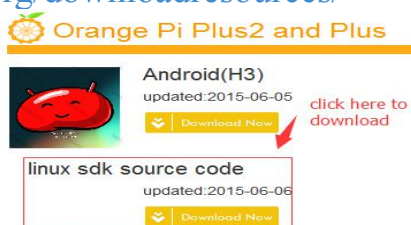

Subsection and compress the file, then unzip it after finish downloaded:

```
curry@curry:$ ls
android lichee Patch
curry@curry:$ cd lichee/
curry@curry:$ ls
brandy buildroot build.sh linux-3.10 out README tools
curry@curry:$
```

buildroot: Project compilation script

brandy: gcc-linaro, boot and uboot source code and open source cross compiler tool

linux-3.10: Kernel source code

tools: Tools of project compilation

build.sh: compilation script

2. Compile Project Source Code

You need to compile the entire project while it is your first time to use the source code. You can use the following commands in the /lichee directory to complete the project:

- Enter into content of lichee, command

```
$ ll -a
```

Check if there is an executable permission on build.sh, if not, modify the permissions

```
$ chmod 755 build.sh
```

- If there is .buildconfig after commanded ll -a, delete it

```
$ rm -rf .buildconfig
```

```
root@curry:/home/curry/lichee# ll -a
总用量 128
drwxr-xr-x 7 curry curry 4096 8月 5 10:23 ./
drwxr-xr-x 24 curry curry 4096 8月 5 10:21 ../
drwxr-xr-x 5 curry curry 4096 1月 27 2015 brandy/
-rw-r--r-- 1 root root 152 8月 3 14:39 .buildconfig
drwxr-xr-x 14 curry curry 4096 1月 27 2015 buildroot/
-rwxr-xr-x 1 curry curry 55 1月 27 2015 build.sh*
lrwxrwxrwx 1 curry curry 33 7月 12 15:18 .git -> ../.allgitrepositories/lichee.git
-rw-r--r-- 1 curry curry 351 1月 27 2015 .gitignore
drwxr-xr-x 25 curry curry 4096 8月 4 10:06 linux-3.4/
drwxr-xr-x 3 root root 4096 8月 3 14:39 out/
-rw-r--r-- 1 curry curry 232 1月 27 2015 README
-rw----- 1 curry curry 83529 7月 9 09:02 Releaseconfig
drwxr-xr-x 7 curry curry 4096 1月 27 2015 tools/
root@curry:/home/curry/lichee# chmod 777 build.sh
```

- Use the following command to compile the entire project



```

$ ./build.sh config
root@curry:/home/curry/lichee# ls
brandy buildroot build.sh linux-3.4 README Releaseconfig tools
root@curry:/home/curry/lichee# ./build.sh config

```

Use this command to compile the entire project

At this point the system will prompt the choice of the chip, as shown below, for OrangePi, select sun50iw2p1

At this point, the system will be prompted to select the platform, as shown below, for OrangePi, select Android

At this point, the system will be prompted the choice of the board, as shown below, for the OrangePi, select dolphin-p1

```

Welcome to mkscript setup progress
All available chips:
 0. sun6i
 1. sun8iw6p1
 2. sun8iw7p1
 3. sun9iw1p1
Choice: 2
All available platforms:
 0. android
 1. dragonboard
 2. linux
Choice: 1
not set business, to use default!
LICHEE_BUSINESS=
using kernel 'linux-3.4':
All available boards:
 0. dolphin-cmcc-wasu-p1
 1. dolphin-p1
 2. dolphin-perf
 3. fpga
Choice: 1

```

Appear this interface indicates waiting for the compiler.

```

INFO: -----
INFO: build lichee ...
INFO: chip: sun8iw7p1
INFO: platform: dragonboard
INFO: business:
INFO: kernel: linux-3.4
INFO: board: dolphin-p1
INFO: output: out/sun8iw7p1/dragonboard/dolphin-p1
INFO: -----
INFO: build buildroot ...
installing external toolchain
please wait for a few minutes ...

```

Wait fifteen minutes or so, compile complete.

```

make[1]: 正在离开目录 `~/home/curry/Downloads/lichee/buildroot/target/`
generating rootfs...
blocks: 85M -> 112M
Creating filesystem with parameters:
  Size: 117440512
  Block size: 4096
  Blocks per group: 32768
  Inodes per group: 7168
  Inode size: 256
  Journal blocks: 1024
  Label:
  Blocks: 28672
  Block groups: 1
  Reserved block group size: 7
Created filesystem with 3653/7168 inodes and 23020/28672 blocks
e2fsck 1.42.9 (4-Feb-2014)
success in generating rootfs
Build at: 2016年 08月 03日 星期三 14:55:30 CST
INFO: build rootfs OK.
-----
build sun8iw7p1 dragonboard lichee OK

```

Indicates success




3. Update the Kernel Image File and Replace Library

- After compilation is finished, the following files will be generated in the directory:

libs: lichee/out/sun8iw7p1/android/common/lib/modules/3.4.39

Download image from official website:

<http://www.orangepi.org/downloadresources/>

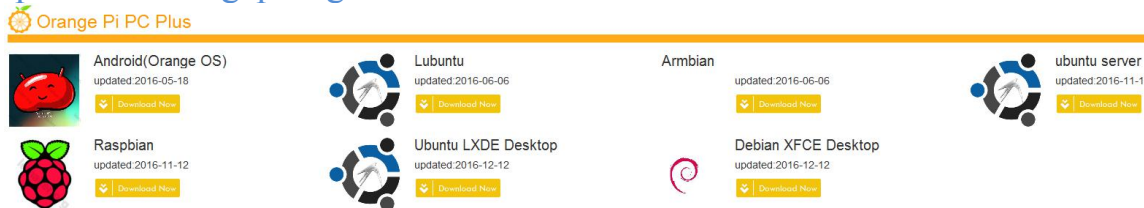

- Write the image:

\$ sudo dd bs=4M if=* .img of=/dev/sdb

```
curry@curry:~$ sudo dd bs=4M if=Ubuntu_Server_Xenia1_PC2_V0_9_0.img of=/dev/sdc
[sudo] password for curry:
记录了555+1 的读入
记录了555+1 的写出
2329935872字节(2.3 GB)已复制, 230.669 秒, 10.1 MB/秒
```


Pull out the card reader, and then insert it again.

At this time, the SD card is inserted into PC, view the SD card mount point (if you don't know how to get a mount point for the SD card, please refer to the diagram below).


```
root@curry:~# mount
/dev/sda8 on / type ext4 (rw,errors=remount-ro)
proc on /proc type proc (rw,noexec,nosuid,nodev)
sysfs on /sys type sysfs (rw,noexec,nosuid,nodev)
none on /sys/fs/cgroup type tmpfs (rw)
none on /sys/fs/fuse/connections type fusectl (rw)
none on /sys/kernel/debug type debugfs (rw)
none on /sys/kernel/security type securityfs (rw)
udev on /dev type devtmpfs (rw,nodev=0755)
devpts on /dev/pts type devpts (rw,noexec,nosuid,gid=5,mode=0620)
tmpfs on /run type tmpfs (rw,noexec,nosuid,size=10%,mode=0755)
none on /run/lock type tmpfs (rw,noexec,nosuid,nodev,size=5242880)
none on /run/shm type tmpfs (rw,nosuid,nodev)
none on /run/user type tmpfs (rw,noexec,nosuid,nodev,size=104857600,mode=0755)
none on /sys/fs/pstore type pstore (rw)
/dev/sda7 on /boot type ext4 (rw)
/dev/sda9 on /home type ext4 (rw)
rpc_pipefs on /run/rpc_pipefs type rpc_pipefs (rw)
blnfmt_misc on /proc/sys/fs/blnfmt_misc type blnfmt_misc (rw,noexec,nosuid,nodev)
systemd on /sys/fs/cgroup/systemd type cgroup (rw,noexec,nosuid,nodev,names=systemd)
gvfsd-fuse on /run/user/1000/gvfs type fuse.gvfsd-fuse (rw,nosuid,nodev,user=curry)
/dev/sdb2 on /media/curry/61187ff0-6686-48dd-832e-f8f0589696e9 type ext4 (rw,nosuid,nodev,uhelper=udisks2)
/dev/sdb1 on /media/curry/F875-EAED type vfat (rw,nosuid,nodev,uid=1000,gid=1000,shortname=mixed,dnsc=0077,utf8=1,showexec,flush,uhelper=udisks2)
```

You could know the mount point by this

The first boot partition

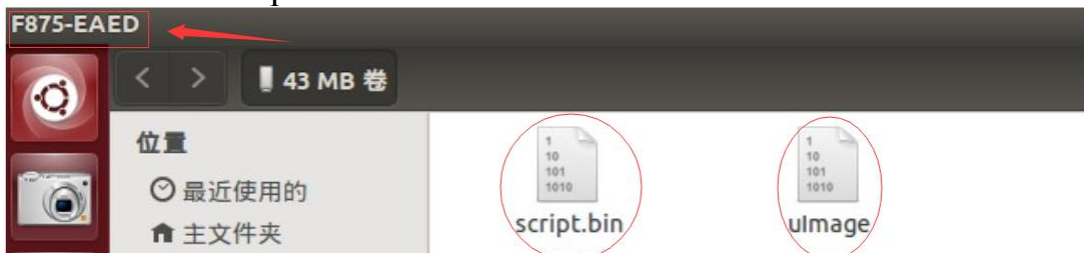

The second rootfs partition

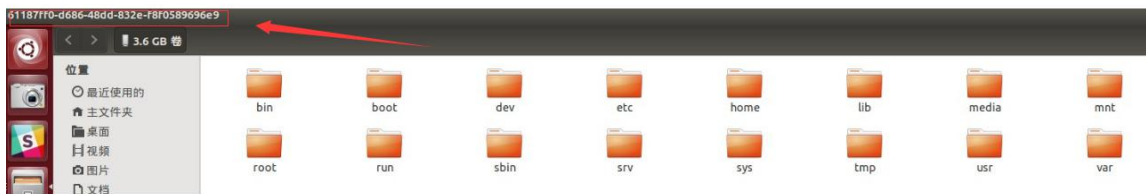

Copy the kernel image file generated by the compiler to the first partition (boot partition)


Copy the lib library which generated after compilation to the second partition (rootfs partition)

We would suggest using compilation system on github of official website.


```
curry@curry:~$ ls
build.sh  external  kernel  output  scripts  toolchain  uboot
```

- build.sh Execute script into the graphical interface of compilation
- external Inside are patch and some configuration kernel file
- output File generated
- script Script compiled
- toolchain Cross compiler location
- uboot uboot source code


Execute ./build.sh enter into graphical interface and select PC Plus

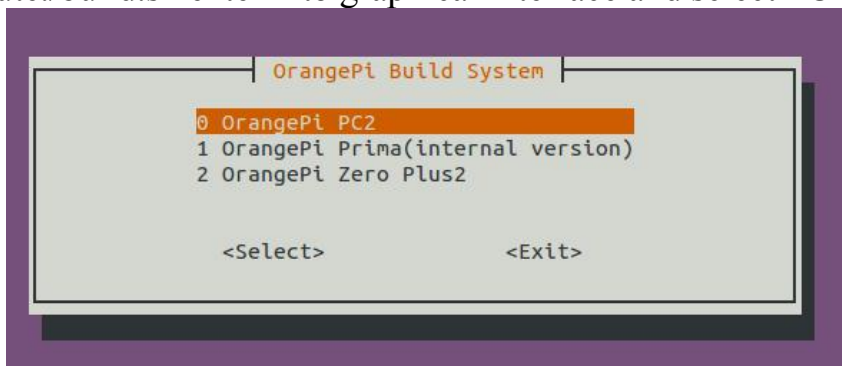


Enter password of root

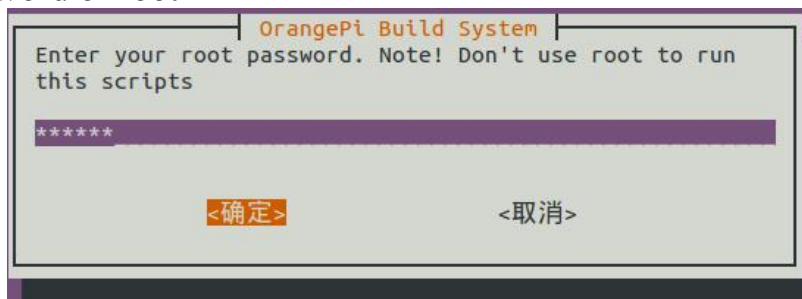

Update Kernel directory and module

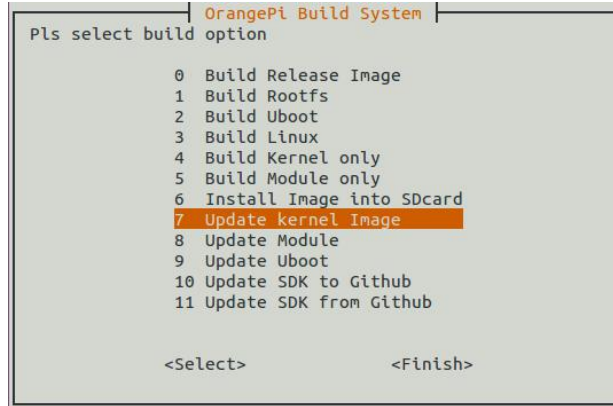


Select corresponding file directory and update uImage and modules

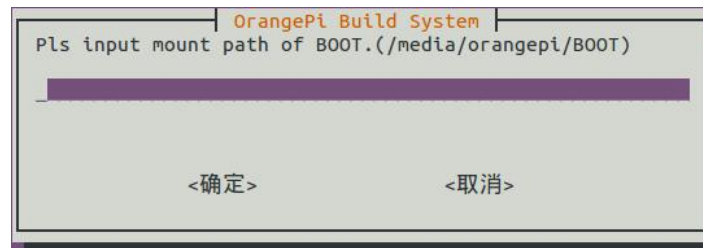



IV. Android Kernel Source Code Compilation

Hardware: Orange Pi development board*1, Card reader*1, TF card*1, power supply*1

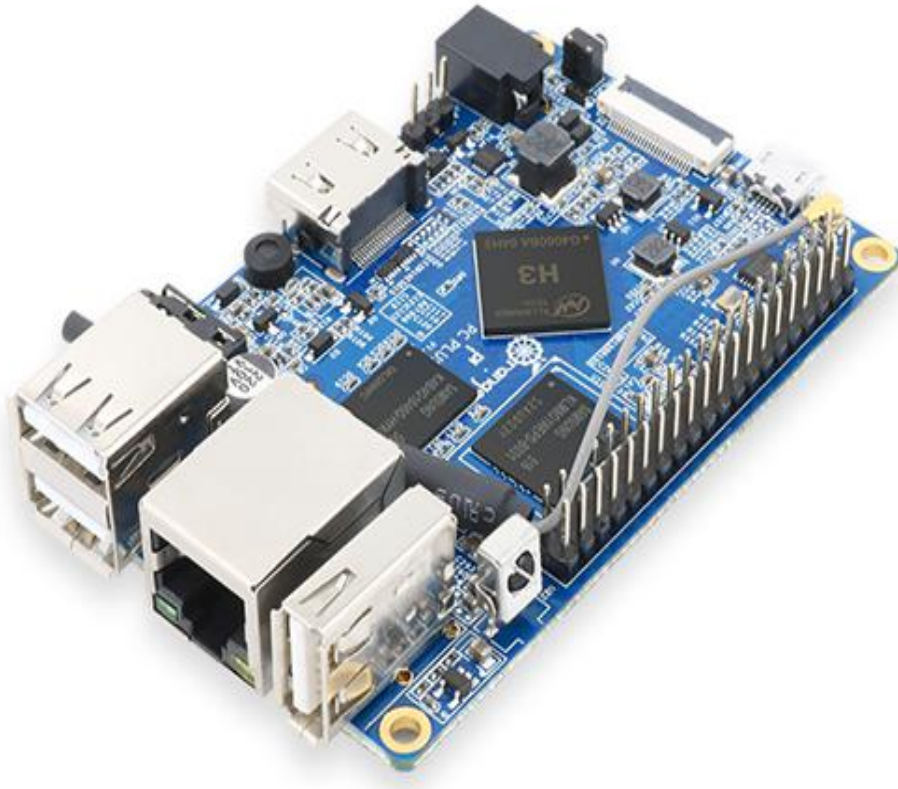

Software

Linux host computer, which hard disk space at least 50G (to meet a fully compiled need)

Linux host computer needs:

Version 2.7.3 of Python;

Version 3.81-3.82 of GNU Make;

JDK 6;

Version 1.7 or higher version of Git.



1. Install JDK

The following will illustrate jdk1.6 installation, it would be same for jdk1.7 installation.

- Download and install JDK, you will obtain jdk-6u31-linux-x64.bin
- Modify the permission of jdk-6u31-linux-x64.bin, which has no prior permission
- `./jdk-6u31-linux-x64.bin`

It will generate a folder:

```
root@curry:/home/curry/tools# ls
1_arm-linux-gnueabi-hf-gcc      java1.6_environment.sh  jdk-6u31-linux-x64.bin
arm-linux-gcc-4.5.1-v6-vfp-20120301.tgz  jdk1.6.0_31            opt
```

- Input at terminal

Note that JAVA_HOME is the name of the current directory, you need to fill in according to your own storage directory.

```
root@curry:/home/curry/tools# ls
1_arm-linux-gnueabi-hf-gcc      java1.6_environment.sh  jdk-6u31-linux-x64.bin
arm-linux-gcc-4.5.1-v6-vfp-20120301.tgz  jdk1.6.0_31            opt
```

```
$ export JAVA_HOME=*/jdk1.6.0_31
$ export PATH=$PATH:/$JAVA_HOME/bin
$ export CLASSPATH=.:$JAVA_HOME/lib
$ export JRE_HOME=$JAVA_HOME/jre
```

```
root@curry:/home/curry/tools# export JAVA_HOME=/home/curry/tools/jdk1.6.0_31
root@curry:/home/curry/tools# export PATH=$PATH:/$JAVA_HOME/bin
root@curry:/home/curry/tools# export CLASSPATH=.:$JAVA_HOME/lib
root@curry:/home/curry/tools# export JRE_HOME=$JAVA_HOME/jre
```

- Command line input Jav and press tab to see whether it can auto completion (Java), which indicates it can successfully installed

2. Install Platform Supported Software

```
$ sudo apt-get install git gnupg flex bison gperf build-essential \
zip curl libc6-dev libncurses5-dev:i386 x11proto-core-dev \
libx11-dev:i386 libreadline6-dev:i386 libgl1-mesa-glx:i386 \
libgl1-mesa-dev g++-multilib mingw32 tofrodos \
python-markdown libxml2-utils xsltproc zlib1g-dev:i386
$ sudo ln -s /usr/lib/i386-linux-gnu/mesa/libGL.so.1
/usr/lib/i386-linux-gnu/libGL.so
```


3. Download Android Source Package

Download website(source code is same for all boards of H3 chip):

<http://www.orangepi.org/downloadresources/>



Orange Pi Plus2 and Plus

 <p>Android(H3) updated:2015-06-05</p> <p>Download Now</p>	<p>Click here to download</p> 	 <p>Debian Server updated:2015-06-06</p> <p>Download Now</p>
<p>linux sdk source code updated:2015-06-06</p> <p>Download Now</p>	<p>android sdk source code updated:2015-06-06</p> <p>Download Now</p>	

Then you will obtain the following directories:

```
curry@curry:~$ ls
android  lichee
```

4. Install Compiler Tool Chain

The compiler tool chain has been integrated in Android SDK. Tool chain is on: lichee/brandy/gcc-linaro/ of Android SDK(already exist)

```
brandy buildroot build.sh linux-3.4 README tools
root@curry:~/OrangePi/android/lichee# cd brandy/gcc-linaro/bin/
root@curry:~/OrangePi/android/lichee/brandy/gcc-linaro/bin# ls
arm-linux-gnueabi-addr2line      arm-linux-gnueabi-gprof
arm-linux-gnueabi-ar             arm-linux-gnueabi-ld
arm-linux-gnueabi-as             arm-linux-gnueabi-ld.bfd
arm-linux-gnueabi-c++           arm-linux-gnueabi-ldd
arm-linux-gnueabi-c++filt       arm-linux-gnueabi-ld.gold
arm-linux-gnueabi-cpp           arm-linux-gnueabi-nm
```

5. Compile Lichee Source Code

There are Android and Lichee after unzipped the package, enter the directory of Lichee:

```
$ cd lichee
$ ./build.sh lunch
```

```
root@curry:~/OrangePi/android/lichee# ls
brandy buildroot build.sh linux-3.4 README tools
root@curry:~/OrangePi/android/lichee# ./build.sh lunch
All available lichee lunch:
0. sun8iw6p1-android-eagle
1. sun8iw6p1-android-secure
2. sun8iw7p1-android-dolphin
3. sun8iw7p1-android-secure
4. sun8iw7p1-android-karaok
5. sun8iw8p1-android
6. sun9iw1p1-android-jaws
7. sun9iw1p1-android-secure
8. sun9iw1p1-android-optimus
Choice: 2
```

Select sun8iw7p1

Print information of successful compilation

```
sun8iw7p1 compile Kernel successful
INFO: build kernel OK.
INFO: build rootfs ...
INFO: skip make rootfs for android
INFO: build rootfs OK.
-----
build sun8iw7p1 android dolphin lichee OK
```




V. Use Project Configuration Files

1. sys_config.fex Introduction

Configure hardware: sys_config.fex

The sys_config.fex is a binary configuration file that used by the SOC kernel driver or LiveSuit for a particular target board, including how to set up a variety of peripherals, ports, and I/O which based on the target version.

For OrangePi, the location of the project configuration document is:
lichee/tools/pack/chips/sun8iw7p1/configs/dolphin-p1/sys_config.fex

Copy the file to the directory of /lichee, use command:

```
$ cd ./lichee
```

```
$ cp ./tools/pack/chips/sun8iw7p1/configs/dolphin-p1/sys_config.fex ./
```

```
root@curry:/home/curry/Downloads/lichee# cp tools/pack/chips/sun8iw7p1/configs/dolphin-p1/sys_config.fex ./
root@curry:/home/curry/Downloads/lichee# ls
autoconfig.sh  brandy  buildroot  build.sh  Config  linux-3.4  Old  out  README  Releaseconfig  script.bin  Sys_config  sys_config.fex  tools
root@curry:/home/curry/Downloads/lichee#
```

You could personalized configuration of sys_config.fex according to sysconfig1.fex_manul_linux_BSP_v0.4.pdf.

Direcotory of sysconfig1.fex_manul_linux_BSP_v0.4.pdf is
/lichee/buildroot/docs.

2. Update Uboot and boot

After modified sys_config.fex, update the new data into SD card(please note that the SD card should have wrote with image, if not, please first finished image writing). Uboot tool will supply in the official website.

If the mounted point of image is“/dev/sdb”, then you could enter the following command to update u-boot, boot and script.bin:

```
$ dd if=boot0_sdcard_sun8iw7p1.bin of=/dev/sdb bs=1024 seek=8
```

```
$ dd if=u-boot-sun8iw7p1.bin of=/dev/sdb bs=1024 seek=16400
```

u-boot and boot should have been update after the above commands, but the engineering configuration of the binary file has not yet been updated.

Copy the generated script.bin to boot partition:

```
$ cd /lichee/
```

```
$ cp script.bin /media/*/boot/ -rf
```

After that, engineering configuration file should have been updated and Orange Pi would run with the new configuration data.



3. Examples

1) Modify the output mode into tv

- tv-out out, the output type of tv0 is invalid, you need to set the output type of tv1 into pal.

Modify defaulted enable display output configuration into tv

```
[tv0]
used = 1
tv_dac_used = 1
dac_src0 = 0
dac_type0= 0
interface= 1
[tvout_para]
tvout_used= 1
tvout_channel_num= 1
```

```
[disp]
disp_init_enable= 1
disp_mode= 1
screen0_output_type= 2
screen0_output_mode= 11
screen1_output_type= 2
screen1_output_mode= 11
dev0_output_type = 4
dev0_output_mode = 4
dev0_screen_id = 0
dev0_do_hpd = 1
dev1_output_type = 2
dev1_output_mode = 11
```

Modify sys_confi and replace it when it generated script.bin. It would be faster if use compilation system on github. About compilation you could refer to the charter of Linux Compilation.

2) Loading tv.ko module automatically after booted

Enter /lib/ directory, enter command:

```
depmod -a
```

Add one more line on /etc/modules

```
tv
```




It would be tv out after booted

- Capacitance touch panel (capacitor tp)

Configuration Item	Configuration Meaning
ctp_used=xx	Whether turn on capacitance touch panel, if so set the value as 1, and vice verso 0.
ctp_name =xx	Indicates the control scheme used in the specified scheme, for now there are: "ft5x_ts" or "Goodix-TS".
ctp_twi_id=xx	Used for selecting i2c adapter, there are 0 and 2.
ctp_twi_addr =xx	Indicates the device address of i2c, it is related to the specific hardware.
ctp_screen_max_x=xx	Maximum coordinates of the X axis of the touch panel
ctp_screen_max_y=xx	Maximum coordinates of the Y axis o the touch panel
ctp_revert_x_flag=xx	Whether needed to flip the X coordinates, if so then set 1, and vice verso 0.
ctp_revert_y_flag=xx	Whether needed to flip the Y coordinates, if so then set 1, and vice verso 0.
ctp_int_port=xx	GPIO configuration of the interrupt signal of capacitive touch panel
ctp_wakeup=xx	GPIO configuration of the wake-up signal of capacitive touch panel
ctp_io_port=xx	Capacitive screen IO signal, currently share with interrupt signal common pin

Configuration samples:

```

ctp_used           = 1
ctp_name           = "ft5x_ts"
ctp_twi_id         = 2
ctp_twi_addr       = 0x70
ctp_screen_max_x   = 800
ctp_screen_max_y   = 480
ctp_revert_x_flag  = 0
ctp_revert_y_flag  = 0
ctp_int_port       = port:PH21<6><default>
ctp_wakeup         = port:PB13<1><default><default><1>

```



```
ctp_io_port = port:PH21<0><default>
```

Note: If you want to support the new capacitive touch IC, you need to combine the configuration of the BSP A10 layer, which should be based on the original capacitive touch IC code, to make the appropriate changes. Specifically, 1) `ctp_twi_id` should be consistent with the hardware connection in `sys_config`; 2) In the drive part of the code: the use of `twi` from the device name + address should be consistent with the `ctp_name` and `ctp_twi_addr` in `sys_config` configuration. At the same time, the other sub configuration in `sysconfig` should also be properly configured, these configurations should be corresponding processing in the program.

3) Modify Resolution

Open item of `disp_init` and modify the subitem `screen0_output_mode`, it would modify into different resolution.

Such as: Screen 0 output mode:(used for tv/hdmi output, 0:480i 1:576i 2:480p 3:576p 4:720p50 5:720p60 6:1080i50 7:1080i60 8:1080p24 9:1080p50 10:1080p60 11:pal 14:ntsc)

The above are some main resolution, you could also find the patch of `z-0003-add-additional-video-modes.patch` and use it to change the resolution into what you want.

How to make the patch:

```
patch -p1 < z-0003-add-additional-video-modes.patch
```

After patched up, recompile the source code with replacing `uImage` and `script.bin`.

For example:


```
1024*768 is 32
1280*1024 is 33
1360*768 is 34
1440*900 is 35
1680*1050 is 36
```



VI. OrangePi Driver development

In order to help developers become more familiar with OrangePi, this manual describes how to use simple device driver modules and applications on the development board.

Hardware: Orange Pi development board*1, Card reader*1, TF card*1, power supply*1

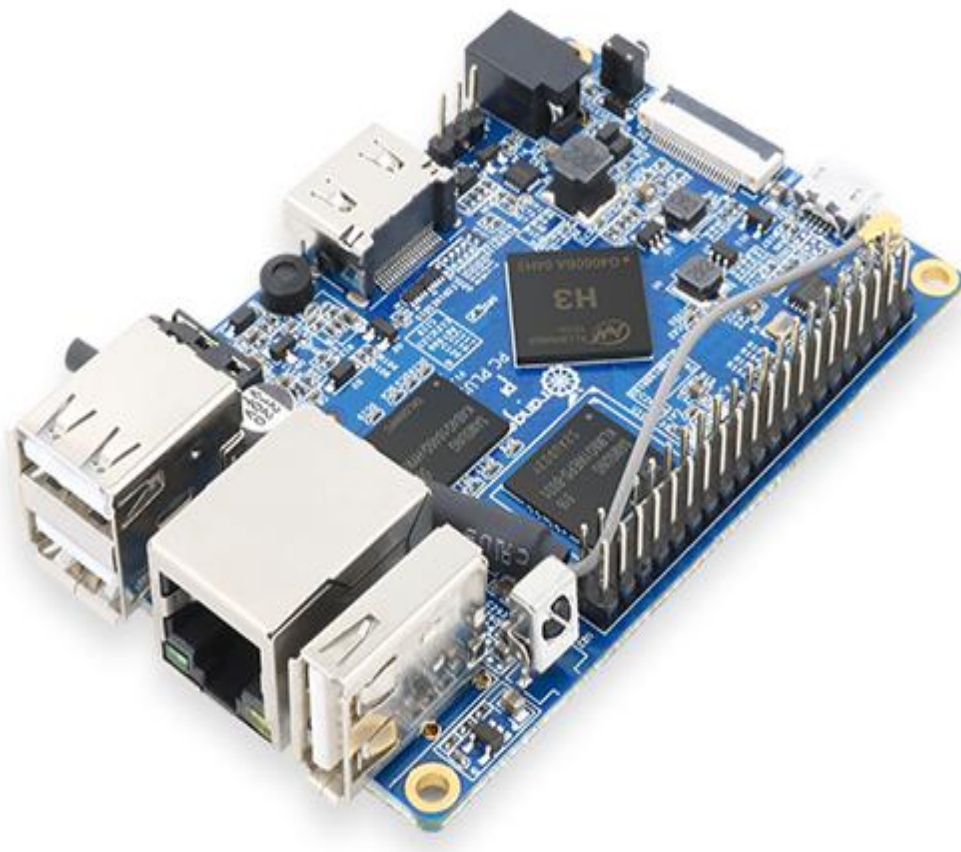

1. Device Driver and Application Programming

1) Application Program (app.c)



```
#include <stdio.h>
#include <sys/types.h>
#include <sys/stat.h>
#include <fcntl.h>
#include <string.h>

int main(int argc, char *argv[])
{
    int cnt, fd;
    char buf[32] = {0};
    if(argc != 2)
    {
        printf("Usage : %s </dev/xxx>\r\n", argv[0]);
        return -1;
    }

    fd = open(argv[1], O_RDWR);
    if(fd < 0)
    {
        printf("APP Error : open device is Failed!\r\n");
        return -1;
    }
    read(fd, buf, sizeof(buf));
    printf("buf = %s\r\n", buf);
    close(fd);
    return 0;
}
```

2) Driver Program (OrangePi_misc.c)



```
#include <linux/kernel.h>
#include <linux/module.h>
#include <linux/fs.h>
#include <linux/miscdevice.h>
#include <linux/init.h>
#include <asm-generic/uaccess.h>

static int orangepi_open(struct inode *inodp, struct file *filp)
{
    return 0;
}

static ssize_t orangepi_read(struct file *filp, char __user *buf, size_t
count, loff_t *offset)
{
    char str[] = "Hello World";
    copy_to_user(buf, str, count);
    return 0;
}

static struct file_operations tOrangePiFops = {
    .owner = THIS_MODULE,
    .open = orangepi_open,
    .read = orangepi_read,
};

static struct miscdevice OrangePi_Misc = {
    .minor = 255,
    .name = "orangepimisc",
    .fops = &tOrangePiFops,
};
```



```

static int __init OrangePi_misc_init(void)
{
    int ret;
    printk("func : %s, line : %d\r\n", __func__, __LINE__);

    ret = misc_register(&OrangePi_Misc);
    if(ret < 0){
        printk("Driver Error : misc_register is Failed!\r\n");
        return -1;
    }
    return 0;
}

static void __exit OrangePi_misc_exit(void)
{
    int ret;
    printk("func : %s, line : %d\r\n", __func__, __LINE__);
    ret = misc_deregister(&OrangePi_Misc);
    if(ret < 0){

        printk("Driver Error : misc_register is Failed\r\n");
    }
}

module_init(OrangePi_misc_init);
module_exit(OrangePi_misc_exit);

```

2. Compile device driver

Copy the OrangePi_misc.c to the directory of :
*/lichee/linux-3.4.39/driver/misc

```

root@curry:/home/curry/driver/char_dri_0804# ls
app.c  aq  Makefile  my_make  OrangePi_misc.c
root@curry:/home/curry/driver/char_dri_0804# cp OrangePi_misc.c /home/curry/Downloads/lichee/linux-3.4/drivers/
misc/

```

Enter to */lichee/linux-3.4.39/drivers/misc/, and modify makefile

```

lichee Lubuntu_1404_For_OrangePiPC_v0_8_0_img Raspbian_For_OrangePi_Plus2E_WIFI.img
root@curry:/home/curry/Downloads# cd lichee/linux-3.4/drivers/misc
root@curry:/home/curry/Downloads/lichee/linux-3.4/drivers/misc# vim Makefile
root@curry:/home/curry/Downloads/lichee/linux-3.4/drivers/misc#

```



Modify Makefile on currently file, shown as following:

```

43 obj-$(CONFIG_SPEAR13XX_PCIE_GADGET) += spear13xx_pcie_gadget.o
44 obj-$(CONFIG_VMWARE_BALLOON) += vmw_balloon.o
45 obj-$(CONFIG_ARM_CHARLCD) += arm-charlcd.o
46 obj-$(CONFIG_PCH_PHUB) += pch_phub.o
47 obj-y += ti-st/
48 obj-$(CONFIG_AB8500_PWM) += ab8500-pwm.o
49 obj-y += lis3lv02d/
50 obj-y += carma/
51 obj-$(CONFIG_USB_SWITCH_FSA9480) += fsa9480.o
52 obj-$(CONFIG_ALTERA_STAPL) +=altera-stapl/
53 obj-$(CONFIG_MAX8997_MUIC) += max8997-muic.o
54 obj-$(CONFIG_WL127X_RFKILL) += wl127x-rfkill.o
55 obj-$(CONFIG_SENSORS_AK8975) += ak8975.o
56 obj-$(CONFIG_SUNXI_VIBRATOR) += sunxi-vibrator.o
57 obj-$(CONFIG_SUNXI_BROM_READ) += sunxi_brom_read.o
58 obj-$(CONFIG_NET) += rf_pm/
59 obj-$(CONFIG_ORANGEPI_MISC) += OrangePi_misc.o

```

Re-modify Makefile

There is Kconfig on the same sibling folders with Makefile. Each Kconfig respectively describes the the source directory file related kernel configuration menu. In the kernel configuration making menuconfig, it read from the Kconfig config menu and the user configuration saved to the config. In the kernel compile, the main Makefile by calling this.Config could know the user's configuration of the kernel.

Kconfig is corresponding to the kernel configuration menu. Add a new driver to the kernel source code, you can modify the Kconfig to increase the configuration menu for your drive, so you can choose whether the menuconfig driver was compiled or not.

```

config SUNXI_BROM_READ
    tristate "Read the BROM infomation"
    depends on ARCH_SUN8I
    default n
    ---help---
    This option can allow program access brom space by the file node.

config ORANGEPI_MISC
    tristate
    default n

```

Modify Kconfig

Back to the source code directory:

```

root@curry:/home/curry/Downloads/lichee# cd /home/curry/Downloads/lichee/

```

Back to the source code directory



\$./build.sh

After compiled the kernel, there will be an orangepi_misc.ko file generated on the directory of lichee/linux-3.4/output/lib/modules/3.4.39

```

root@curry:/home/curry/Downloads/lichee# ./build.sh
INFO: -----
INFO: build lichee ...
INFO: chip: sun8iw7p1
INFO: platform: dragonboard
INFO: business:
INFO: kernel: linux-3.4
INFO: board: dolphin-p1
INFO: output: out/sun8iw7p1/dragonboard/dolphin-p1
INFO: -----
INFO: build buildroot ...
external toolchain has been installed
INFO: build buildroot OK.
INFO: build kernel ...
INFO: prepare toolchain ...
use last time build config
Building kernel
/home/curry/Downloads/lichee/linux-3.4/output/lib/modules/3.4.39
CHK include/linux/version.h
CHK include/generated/utsrelease.h
make[1]: "include/generated/mach-types.h"是最新的。
CALL scripts/checksyscalls.sh
CHK include/generated/compile.h
AS arch/arm/mach-sunxi/power/brom/resumes.o
CC arch/arm/mach-sunxi/power/brom/resume_head.o

Reserved block group size: 7
Created filesystem with 3654/7168 inodes and 23042/28672 blocks
e2fsck 1.42.9 (4-Feb-2014)
success in generating rootfs
Build at: 2016年 08月 04日 星期四 15:53:34 CST
INFO: build rootfs OK.
-----
build sun8iw7p1 dragonboard lichee OK
-----

```

There is a .ko module which generated after compiled of OrangePi_misc.c on */lichee/linux-3.4/output/lib/modules/3.4.39/

```

root@curry:/home/curry/Downloads/lichee# ls linux-3.4/output/lib/modules/3.4.39/OrangePi_misc.ko
linux-3.4/output/lib/modules/3.4.39/OrangePi_misc.ko
root@curry:/home/curry/Downloads/lichee#

```

Insert U disk (please note the SD card should have been written image) if the SD card system is mounted to the directory / dev/ sdb, SD card will have two sub mount points, respectively are / dev / sdb1 and /dev/sdb2. Two partition of SD card will automatically mount to the PC /media/ directory, the first partition is the boot partition and the second partition is the rootfs partition.

The second partition is the rootfs partition





Copy the OrangePi_misc.ko file to /media/*/lib/modules/3.4.39.
 \$ cp OrangePi_misc.ko /media/*/lib/modules/3.4.39

3. Cross compiler Application Program

Here will take arm-linux-gnueabi-hf-gcc as an example. Check whether there is the cross compiler, if not, then download and install it.

\$ arm-linux-gnueabi-hf-gcc -v

```

root@curry:/home/curry/lichee# arm-linux-gnueabi-hf-gcc -v
Using built-in specs.
COLLECT_GCC=arm-linux-gnueabi-hf-gcc
COLLECT_LTO_WRAPPER=/usr/lib/gcc-cross/arm-linux-gnueabi-hf/4.8/lto-wrapper
Target: arm-linux-gnueabi-hf
Configured with: ../src/configure -v --with-pkgversion='Ubuntu/Linaro 4.8.4-2ubuntu1-14
ugurl=file:///usr/share/doc/gcc-4.8/README.Bugs --enable-languages=c,c++,java,go,d,fort
+ --prefix=/usr --program-suffix=-4.8 --enable-shared --enable-linker-build-id --libexe
-without-included-gettext --enable-threads=posix --with-gxx-include-dir=/usr/arm-lin
de/c++/4.8.4 --libdir=/usr/lib --enable-nls --with-sysroot=/ --enable-clocale=gnu --ena
ebug --enable-libstdc++-time=yes --enable-gnu-unique-object --disable-libmudflap --disa
sable-libquadmath --enable-plugin --with-system-zlib --disable-browser-plugin --enable
enable-gtk-cairo --with-java-home=/usr/lib/jvm/java-1.5.0-gcj-4.8-armhf-cross/jre --ena
-with-jvm-root-dir=/usr/lib/jvm/java-1.5.0-gcj-4.8-armhf-cross --with-jvm-jar-dir=/usr/
/java-1.5.0-gcj-4.8-armhf-cross --with-arch-directory=arm --with-ecj-jar=/usr/share/jav
ar --disable-libgjc --enable-objc-gc --enable-multiarch --enable-multilib --disable-sjl
with-arch=armv7-a --with-fpu=vfpv3-d16 --with-float=hard --with-mode=thumb --disable-we
hecking=release --build=x86_64-linux-gnu --host=x86_64-linux-gnu --target=arm-linux-gnu
m-prefix=arm-linux-gnueabi-hf- --includedir=/usr/arm-linux-gnueabi-hf/include
Thread model: posix
gcc version 4.8.4 (Ubuntu/Linaro 4.8.4-2ubuntu1-14.04.1)
root@curry:/home/curry/lichee#
  
```

Check whether there is cross compiler
 Version number

While compiling the application, you will find that you need the cross compiler arm-linux-gnueabi-hf-gcc, download and install it.

```

curry@curry:~/tools/1_arm-linux-gnueabi-hf-gcc$ ls
gcc-linaro-arm-linux-gnueabi-hf-4.9-2014.07_linux.tar.xz
curry@curry:~/tools/1_arm-linux-gnueabi-hf-gcc$
  
```

Downloaded package file

Unzip the downloaded file and enter the the directory

```

curry@curry:~/tools/1_arm-linux-gnueabi-hf-gcc$ tar -xvf gcc-linaro-arm-linux-gnueabi-hf-4.9-2014.07_linux.tar.xz
curry@curry:~/tools/1_arm-linux-gnueabi-hf-gcc$ ls
gcc-linaro-arm-linux-gnueabi-hf-4.9-2014.07_linux  gcc-linaro-arm-linux-gnueabi-hf-4.9-2014.07_linux.tar.xz
curry@curry:~/tools/1_arm-linux-gnueabi-hf-gcc$ cd gcc-linaro-arm-linux-gnueabi-hf-4.9-2014.07_linux/
curry@curry:~/tools/1_arm-linux-gnueabi-hf-gcc/gcc-linaro-arm-linux-gnueabi-hf-4.9-2014.07_linux$ ls
arm-linux-gnueabi-hf  bin  lib  libexec  share
curry@curry:~/tools/1_arm-linux-gnueabi-hf-gcc/gcc-linaro-arm-linux-gnueabi-hf-4.9-2014.07_linux$
  
```

Unzip the package file
 Enter to current directory to check files



Check the information after entering bin directory

```

curry@curry:~/tools/1_arm-linux-gnueabihf-gcc/gcc-linaro-arm-linux-gnueabihf-4.9-2014.07_linux$ ls
arm-linux-gnueabihf-bin  lib  libexec  share
curry@curry:~/tools/1_arm-linux-gnueabihf-gcc/gcc-linaro-arm-linux-gnueabihf-4.9-2014.07_linux$ cd bin/
curry@curry:~/tools/1_arm-linux-gnueabihf-gcc/gcc-linaro-arm-linux-gnueabihf-4.9-2014.07_linux/bin$ ls
arm-linux-gnueabihf-addrt2line  arm-linux-gnueabihf-ldp  arm-linux-gnueabihf-gcc-ranlib  arm-linux-gnueabihf-ldf  arm-linux-gnueabihf-ranlib
arm-linux-gnueabihf-ar  arm-linux-gnueabihf-elfedit  arm-linux-gnueabihf-gcov  arm-linux-gnueabihf-ld.gold  arm-linux-gnueabihf-readelf
arm-linux-gnueabihf-as  arm-linux-gnueabihf-gas  arm-linux-gnueabihf-gdb  arm-linux-gnueabihf-nn  arm-linux-gnueabihf-size
arm-linux-gnueabihf-c++  arm-linux-gnueabihf-gcc-4.9.1  arm-linux-gnueabihf-gfortran  arm-linux-gnueabihf-objcopy  arm-linux-gnueabihf-strings
arm-linux-gnueabihf-c++filt  arm-linux-gnueabihf-gcc-4.9.1  arm-linux-gnueabihf-gprof  arm-linux-gnueabihf-objdump  arm-linux-gnueabihf-strip
arm-linux-gnueabihf-cpp  arm-linux-gnueabihf-gcc-nn  arm-linux-gnueabihf-ld  arm-linux-gnueabihf-pkg-config  arm-linux-gnueabihf-strings
arm-linux-gnueabihf-ct-ng-config  arm-linux-gnueabihf-gcc-nn  arm-linux-gnueabihf-ld.bfd  arm-linux-gnueabihf-pkg-config-real
curry@curry:~/tools/1_arm-linux-gnueabihf-gcc/gcc-linaro-arm-linux-gnueabihf-4.9-2014.07_linux/bin$

```

Find out the tool for compiling

pwd shows the path and export it into the whole project

```

curry@curry:~/tools/1_arm-linux-gnueabihf-gcc/gcc-linaro-arm-linux-gnueabihf-4.9-2014.07_linux/bin$ pwd
/home/curry/tools/1_arm-linux-gnueabihf-gcc/gcc-linaro-arm-linux-gnueabihf-4.9-2014.07_linux/bin
curry@curry:~/tools/1_arm-linux-gnueabihf-gcc/gcc-linaro-arm-linux-gnueabihf-4.9-2014.07_linux/bin$ vim /etc/environment

```

Indicate the path

Environment variables

\$ ll /etc/environment shows that the file can only read, need to modify permissions

\$ chmod 755 /etc/environment

Modify permission

```

root@curry:/home/curry/tools/1_arm-linux-gnueabihf-gcc/gcc-linaro-arm-linux-gnueabihf-4.9-2014.07_linux/bin# ll /etc/environment
-rw-r--r-- 1 root root 151 8月 4 15:24 /etc/environment
root@curry:/home/curry/tools/1_arm-linux-gnueabihf-gcc/gcc-linaro-arm-linux-gnueabihf-4.9-2014.07_linux/bin# chmod 777 /etc/environment
root@curry:/home/curry/tools/1_arm-linux-gnueabihf-gcc/gcc-linaro-arm-linux-gnueabihf-4.9-2014.07_linux/bin# ll /etc/environment
-rwxrwxrwx 1 root root 151 8月 4 15:24 /etc/environment*
root@curry:/home/curry/tools/1_arm-linux-gnueabihf-gcc/gcc-linaro-arm-linux-gnueabihf-4.9-2014.07_linux/bin#

```

Only read, needs to modify permission

Modify permission

After modified permission

Add the path to the whole environment variable

```

PATH="/usr/local/sbin:/usr/local/bin:/usr/sbin:/usr/bin:/sbin:/bin:/usr/games:/usr/local/games:/home/curry/tools/opt/FriendlyARM/toolschain/4.5.1/bin:/home/curry/tools/1_arm-linux-gnueabihf-gcc/gcc-linaro-arm-linux-gnueabihf-4.9-2014.07_linux/bin"

```

Add path

Compile the application with cross compiler

\$ arm-linux-gnueabihf-gcc app.c -o aq

There will be an ap application generated in the directory, copy it to the development board file system(on the rootfs directory of /home/orangepi/)

\$ cp aq /media/*/home/orangepi/



4. Running Driver and Application

Removed the SD card and inserted it into the development board and power on.

You need to switch to root users and load module driver module to the development board first.

\$ insmod /lib/modules/orangepi.ko

```
orangePi@orangePi:~$ su root
Password:
root@orangePi:/home/orangepi# insmod /lib/modules/3.4.39/OrangePi_misc.ko
```

← Switch to super user ← Load driver module

\$ lsmod To check whether it is loaded

```
root@orangePi:/# lsmod
Module              Size  Used by
8189fs              935152  0
OrangePi_misc      1315  0
```

← Check the loaded module ← Check the character device driver

\$ ll /dev/orangepimisc(Miscellaneous equipment automatically generated device files, the specific look at the driver code)

```
root@orangePi:/home/orangepi# ll /dev/orangepimisc
crw----- 1 root root 10, 41 Jan 1 1970 /dev/orangepimisc
```

← View details of the character device


Executive application (note the use of the application, the specific check at the code)

\$./aq /dev/orangepimisc



VII. Using Debug tools on OrangePi

Hardware: Orange Pi development board*1, Card reader*1, TF card*1, power supply*1

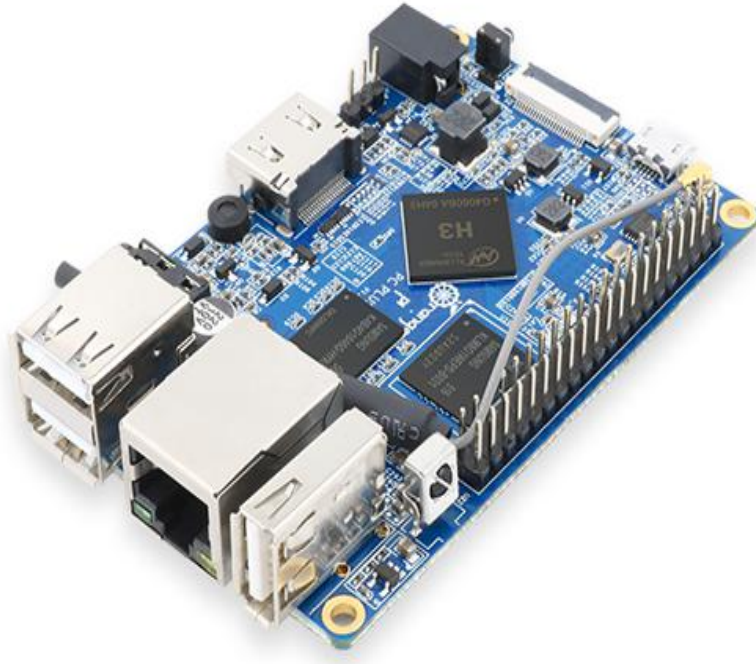

TTL to USB cable



1. Operation Steps on Windows

In order to get more debugging information in the project development




process of using OrangePi, OrangePi default support for serial information debugging. For developers, you can simply get the serial port debugging information with the materials mentioned above. The host computer using different serial debugging tools are similar, basically can reference with the following manual for deployment. There are a lot of debugging tools for Windows platform, the most commonly used tool is putty. This section takes putty as an example to explain the deployment.

1) Install USB driver on Windows

- Download and unzip the latest version of driver
PL2303_Prolific_DriverInstaller_v130.zip



- Choose application installation as Administrator

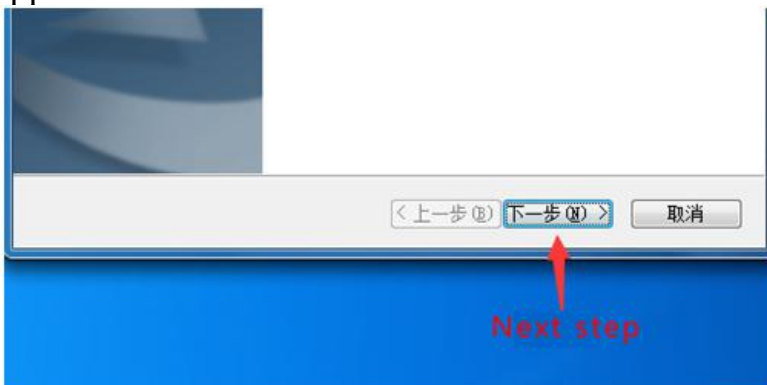


- Wait for completing installation



2) Install putty on Windows

- Download putty installation package




- Unzip and install



636网址导航	2015/5/4 14:21	Internet 快捷方式	1 KB
putty中文版1.0v	2016/1/20 17:13	应用程序	604 KB
XP510下载须知	2015/5/4 14:21	文本文档	2 KB
软件使用说明	2015/5/13 9:23	360 se HTML Do...	1 KB

Click to install

- Open program after installed, as shown below


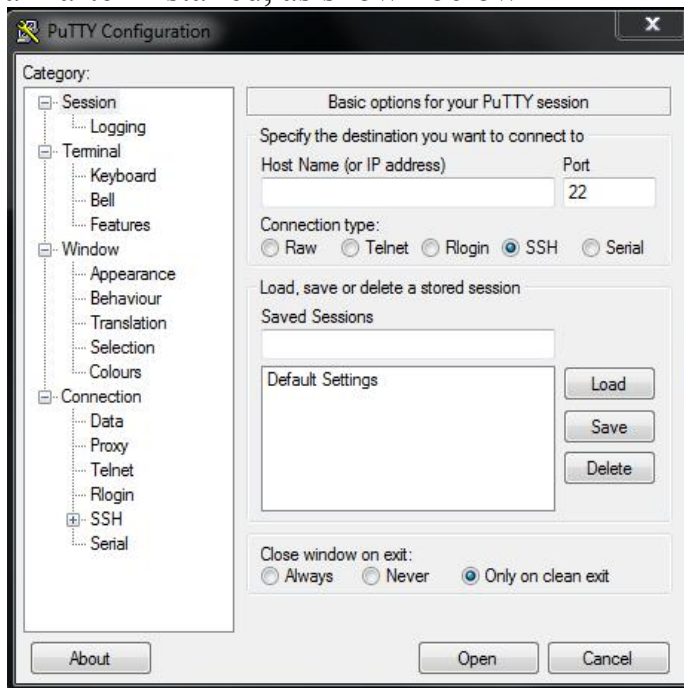


3) Connecting method


Use the TTL to the serial port cable, one end connected to OrangePi, the other end connected to PC

4) Equipment information acquisition


- Start menu select *control panel*

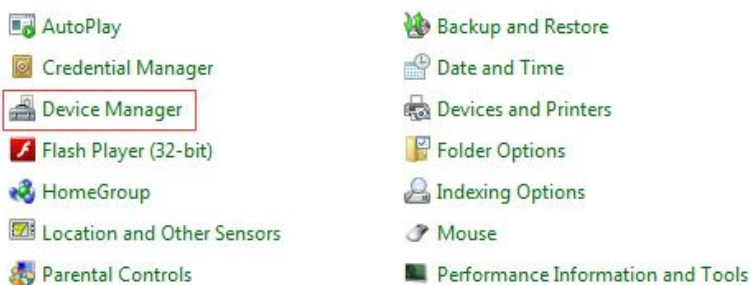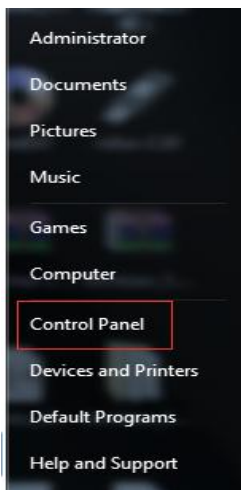

- Click on the *device manager* to check the *port number*

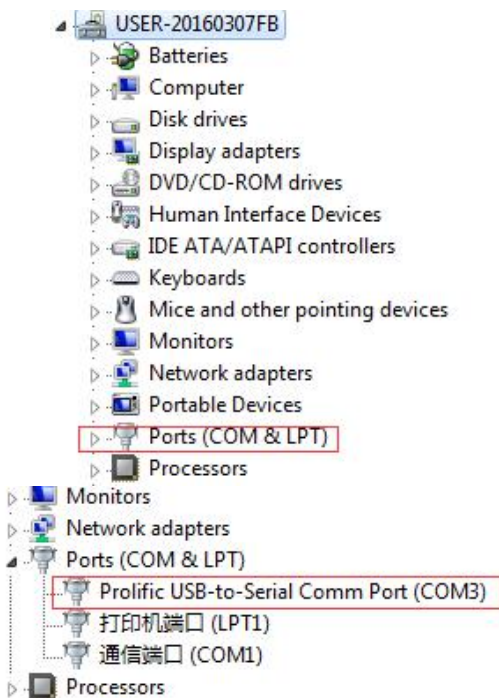


5) Putty Configuration

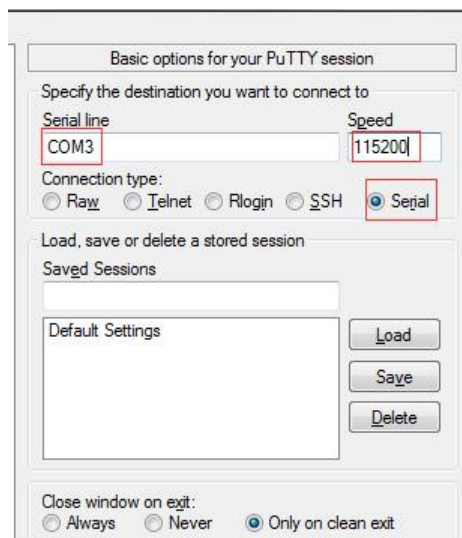

Serial port should set to the corresponding port number (COM5), the speed should set to 115200

6) Serial Debug Port

Power on and boot OrangePi, the serial port will automatic print debug log

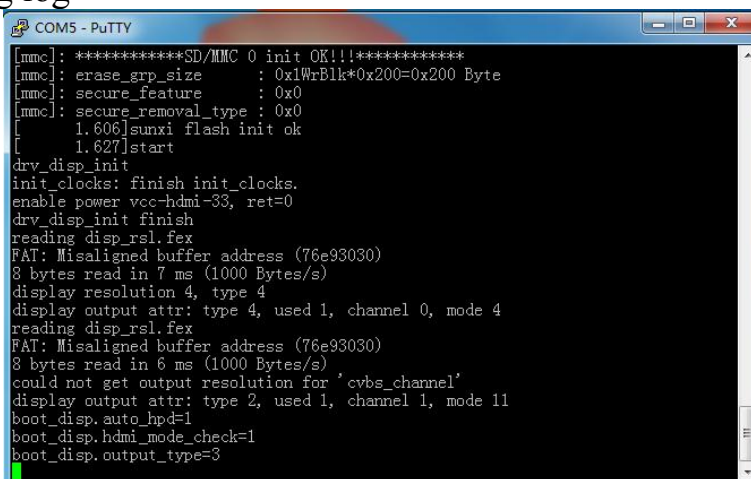

2. Operation Steps on Linux

There are Minicom and Kermit serial debugging tools for Linux, this section will take Kermit as an example to have an illustrate.

1) Install Kermit

- Install the Kermit by execute command:
\$ sudo apt-get install ckermit



```
Terminal
s~$sudo apt-get install ckermit
```

- Configure Kermit

```
$ sudo vi /etc/kermit/kermitrc
```

```
Terminal
~$sudo vi /etc/kermit/kermitrc
```

- Add lines:

```
set line      /dev/ttyUSB1
set speed     115200
set carrier-watch off
set handshake none
set flow-control none
robust
set file type bin
set file name lit
set rec pack  1000
set send pack 1000
set window    5
```

```
root@orange-All-Series: /home/orange
; This is /etc/kermit/kermitrc
; It is executed on startup if ~/.kermitrc is not found.
; See "man kermit" and http://www.kermit-project.org/ for details on
; configuring this file, and /etc/kermit/kermitrc.full
; for an example of a complex configuration file
;
; If you want to run additional user-specific customisations in
; addition to this file, place them in ~/.mykermitrc
;
; Execute user's personal customization file (named in environment var
; CKERMOD or ~/.mykermitrc)
;
;
if def \${CKERMOD} assign _myinit \${CKERMOD}
if not def _myinit assign _myinit \v(home).mykermitrc

xif exist \n(_myinit) {
    echo Executing \n(_myinit)...
    take \n(_myinit)
}

set line      /dev/ttyUSB1
set speed     115200
set carrier-watch off
set handshake none
set flow-control none
robust
set file type bin
set file name lit
set rec pack  1000
set send pack 1000
set window    5
c
```

Add this lines



2) Connecting method




Use the TTL to the serial port cable, one end connected to OrangePi, the other end connected to PC

3) Equipment information acquisition

Input command in the PC terminal to check the device number of TTL to the serial cable


\$ ls /dev/

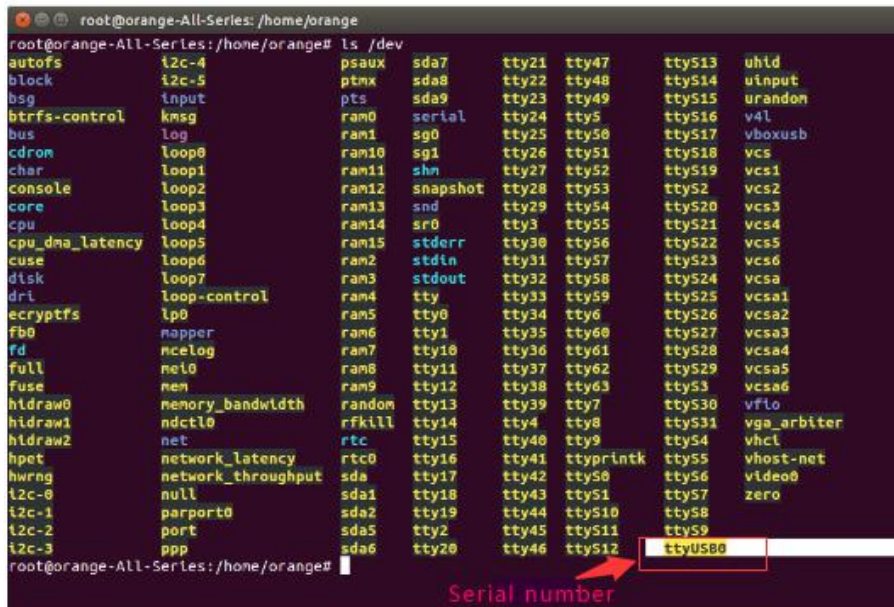

- It can be seen from the figure that TTL to the serial port cable is identified as ttyUSB0, configure the /etc/kermit/kermitc file, update the serial port information.

\$ sudo vi /etc/kermit/kermitc

- Set the value of setline into /dev/ttyUSB0

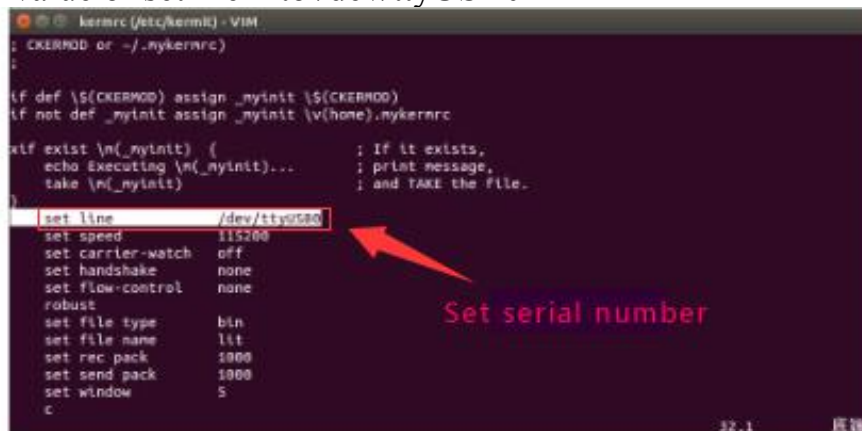



4) Start debug

- Input command in the host computer terminal, enter the Kermit mode:
\$ sudo kermit -c

```
root@orange-All-Series: /home/orange
root@orange-All-Series:/home/orange# kermit -c
Connecting to /dev/ttyUSB0, speed 115200
Escape character: Ctrl-\ (ASCII 28, FS): enabled
Type the escape character followed by C to get back,
or followed by ? to see other options.
-----
```

- Power on and boot OrangePi, the serial port will automatic print debug log

```
root@orange-All-Series: /home/orange
Connecting to /dev/ttyUSB0, speed 115200
Escape character: Ctrl-\ (ASCII 28, FS): enabled
Type the escape character followed by C to get back,
or followed by ? to see other options.
-----
HELLO! BOOT0 is starting!
boot0 commit : 8
boot0 version : 4.0
set pll start
set pll end
rtc[0] value = 0x00000000
rtc[1] value = 0x00000000
rtc[2] value = 0x00000000
rtc[3] value = 0x00000000
rtc[4] value = 0x00000000
rtc[5] value = 0x00000000
DRAMC IS FOUR
DRAM BOOT DRIVE INFO: V1.1
the chip id is 0x00000001
the chip id is 0x00000001
the chip id is 0x00000001
the chip id is 0x00000001
the chip id is 0x00000001
```