










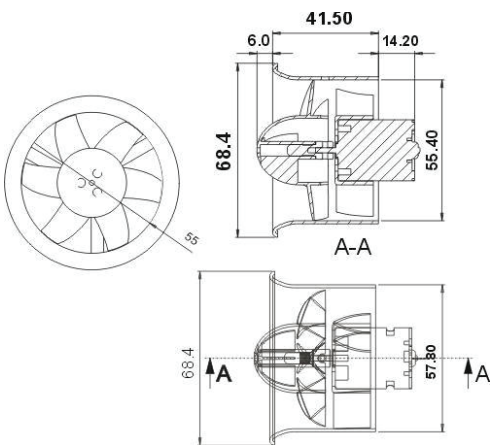


Model	Description	MSRP	Dealer	
EDF55				
	Parts Number	Description	MSRP	Dealer
	GW/EDF55-150	Ducted Fan (66.00g): 3.6V – 9.6V (Fan: 2245x6) w/EM150 Motor (M3 Connector) w/Hex Wrench x 1 (for M2.6 Set Screw)	\$9.89	A
	GW/EDF55-300H	Ducted Fan (72.00g): 3.6V – 9.6V (Fan: 2245x6) w/EM300H Motor (M3 Connector) w/Hex Wrench x 1 (for M2.6 Set Screw)	\$13.90	A
	GWEDF055	Ducted Fan (66.00g): 3.6V – 9.6V (Fan: 2245x6) w/EM150 Motor (M3 Connector) w/Hex Wrench x 1 (for M2.6 Set Screw) – <i>(Removable Design)</i>	\$11.38	A
	GWEDF055A	Ducted Fan (72.00g): 3.6V – 9.6V (Fan: 2245x6) w/EM300H Motor (M3 Connector) w/Hex Wrench x 1 (for M2.6 Set Screw) – <i>(Removable Design)</i>	\$15.75	A
	GW/EDF55-150-1	Duct for EDF55-150 (1pcs) (Black)	\$4.50	A
	GW/EDF55-300H-1	Duct for EDF55-300H (1pcs) (Gray)	\$4.50	B
	GWDFS005	Duct for EDF055/EDF55-150 (1pcs) (Black)	\$5.00	B
	GWDFS006	Duct for EDF055A/EDF55-300H (1pcs) (Gray)	\$5.00	B
	GW/EDF55-5	Fan: 2245x6 for EDF55-150/EDF55-300H (Black)	\$2.50	B
	GWDFS002	Fan: 2245x6 for EDF055/EDF055A/EDF55-150/EDF55-300H (Black)	\$2.50	B
	GWADP003	*Impeller Hub for EDF055/EDF055A/EDF064/EDF064A	\$3.75	B
	GWADP003A	*Impeller Hub; M2.6 Hex Wrench/Screw for EDF055/EDF055A/EDF064/EDF064A	\$4.50	B
		*: Adapter Shaft: 4.5mm; For Motor Shaft 2mm		
	GW/EDF64-3	M2.6 Set Screw for Impeller (GWADP003) (5pcs)	\$1.25	B
	GWAPS069	M2.6 Hex Wrench x 1; M2.6 Set Screw for Impeller (GWADP003) (5pcs)	\$2.50	B
				
	GW/EDF55-150-1			
				
	GWEDF55-300H-1			
				
	GW/EDF55-5			
				
	GWDFS002			
				
	GWDFS005			
				
	GWDFS006			
				
	GWADP003			
				
	GWADP003A			

Volts	Amps	Thrust	Power	Efficiency	Duct	Fan	Motor	Heat Sink
GW/EDF55-150								
3.6V	1.5A	32g (1.13oz)	5.40w	5.93g/w (0.209oz/w)	17.8g	4.80g	43.1g	1.20g
4.8V	2.2A	50g (1.76oz)	10.56w	4.73g/w (0.167oz/w)		2245x6	EM150	
6.0V	3.0A	77g (2.72oz)	18.00w	4.28g/w (0.151oz/w)	Black	Black/Orange		
7.2V ¹	3.8A	95g (3.35oz)	27.36w	3.47g/w (0.122oz/w)				
8.4V ²	4.8A	119g (4.20oz)	40.32w	2.95g/w (0.104oz/w)				
9.6V ²	5.9A	141g (4.97oz)	56.64w	2.49g/w (0.088oz/w)				
GW/EDF55-300H								
3.6V	1.9A	37g (1.30oz)	6.84w	5.41g/w (0.191oz/w)	17.80g	4.80g	49.6g	1.20g
4.8V	2.6A	58g (2.05oz)	12.48w	4.65g/w (0.164oz/w)		2245x6	EM300H	
6.0V	3.3A	77g (2.72oz)	19.80w	3.89g/w (0.137oz/w)	Gray	Black/Orange		
7.2V ¹	4.3A	107g (3.77oz)	30.96w	3.46g/w (0.122oz/w)				
8.4V ²	5.3A	129g (4.55oz)	44.52w	2.90g/w (0.102oz/w)				
9.6V ²	6.1A	158g (5.57oz)	58.56w	2.70g/w (0.095oz/w)				
GWEDF055								
3.6V	1.5A	32g (1.13oz)	5.40w	5.93g/w (0.209oz/w)	17.80g	4.80g	43.1g	1.20g
4.8V	2.2A	50g (1.76oz)	10.56w	4.73g/w (0.164oz/w)		2245x6	EM150	
6.0V	3.0A	77g (2.72oz)	18.00w	4.28g/w (0.151oz/w)	Black	Black/Orange		
7.2V ¹	3.8A	95g (3.35oz)	27.36w	3.47g/w (0.122oz/w)				
8.4V ²	4.8A	119g (4.20oz)	40.32w	2.95g/w (0.104oz/w)				
9.6V ²	5.9A	141g (4.97oz)	56.64w	2.49g/w (0.088oz/w)				
GWEDF055A								
3.6V	1.9A	37g (1.30oz)	6.84w	5.41g/w (0.191oz/w)	17.80g	4.80g	49.6g	1.20g
4.8V	2.6A	58g (2.05oz)	12.48w	4.65g/w (0.164oz/w)		2245x6	EM300H	
6.0V	3.3A	77g (2.72oz)	19.80w	3.89g/w (0.137oz/w)	Gray	Black/Orange		
7.2V ¹	4.3A	107g (3.77oz)	30.96w	3.46g/w (0.122oz/w)				
8.4V ²	5.3A	129g (4.55oz)	44.52w	2.90g/w (0.102oz/w)				
9.6V ²	6.1A	158g (5.57oz)	58.56w	2.70g/w (0.095oz/w)				

1: Heat Sink is recommended (GW/EHS-300)
2: MUST install the Heat Sink (GW/EHS-300)



GWEDF055 and GWEDF055A - Removable Design

