








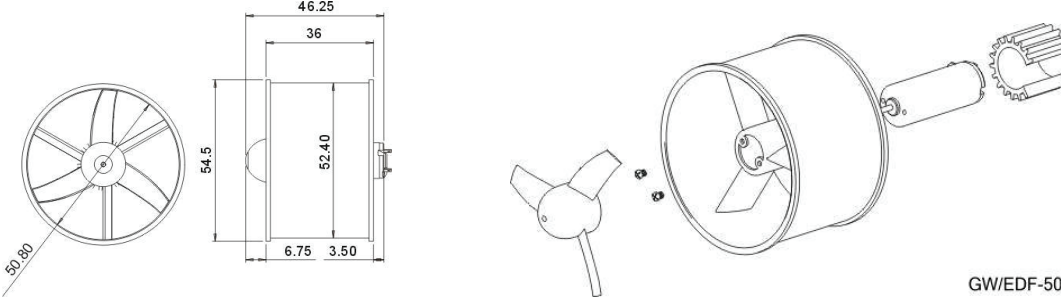


Model	Description								
EDF50									
	Parts Number	Description	MSRP	Dealer					
	GW/EDF50	Ducted Fan (29.81g): 6V – 7.2V (Fan: 2020x3) w/CN12-RLC Motor (M3 Connector) w/Heat Sink (GW/EHS-12) installed	\$11.73	A					
	GW/EDF50A	Ducted Fan (29.81g): 6V – 7.2V (Fan: 2030x3) w/CN12-RLC Motor (M3 Connector) w/Heat Sink (GW/EHS-12) installed	\$11.73	A					
	GW/EDF50B	Ducted Fan (29.98g): 6V – 7.2V (Fan: 2030x5) w/CN12-RLC Motor (M3 Connector) w/Heat Sink (GW/EHS-12) installed	\$11.73	A					
	GW/EDF50H	Ducted Fan (29.81g): 9.6V – 10.8V (Fan: 2020x3) w/CN12-RXC Motor (M3 Connector) w/Heat Sink (GW/EHS-12) installed	\$11.73	A					
	GW/EDF50AH	Ducted Fan (29.81g): 9.6V – 10.8V (Fan: 2030x3) w/CN12-RXC Motor (M3 Connector) w/Heat Sink (GW/EHS-12) installed	\$11.73	A					
	GW/EDF50BH	Ducted Fan (29.98g): 9.6V – 10.8V (Fan: 2030x5) w/CN12-RXC Motor (M3 Connector) w/Heat Sink (GW/EHS-12) installed	\$11.73	A					
	GW/EDF50-1	Duct for All EDF50 Series (1pcs) (Black)	\$5.00	B					
	GW/EDF50-2	Motor CN12-126 w/Capacitor; w/W22 100mm wire (M3 Connector); w/M1.6 Screw x 2; Compatible with all EDF50 and EDF40 Series Ducted Fan (Motor Diameter: 12.02mm)	\$10.50	B					
	GW/EDF50-4	Motor CN12-126 w/Capacitor; w/W22 100mm wire (M3 Connector); w/M1.6 Screw x 2; (GW/EDF50-2); Heat Sink (GW/EHS-12) x 1 Compatible with all EDF50 and EDF40 Series Ducted Fan (Motor Diameter: 12.02mm)	\$11.75	B					
	GW/EDF50-5	Fan: 2020x3 for EDF50/EDF50H (Black)	\$2.50	B					
	GW/EDF50-6	Fan: 2030x3 for EDF50A/50AH (Black)	\$2.50	B					
	GW/EDF50-7	Fan: 2030x5 for EDF50B/50BH (Orange)	\$2.50	B					
	GW/EDF50H-4	Motor: CN12-124 w/Capacitor; w/W22 100mm wire (M3 Connector); w/M1.6 Screw x 2; Heat Sink (GW/EHS-12) x 1 Compatible with all EDF50 and EDF40 Series Ducted Fan (Motor Diameter: 11.96mm)	\$11.75	B					
	Volts	Amps	Thrust	Power	Efficiency	Duct	Fan	Motor	Heat Sink
	GW/EDF50								
	6.0V	2.62A	54g (1.91oz)	15.72w	3.44g/w (0.121oz/w)	9.00g	1.08g	16.7g	3.03g
	7.2V	3.39A	72g (2.54oz)	24.41w	2.95g/w (0.104oz/w)	Black	2020x3 Black/Orange	CN12-RLC	Black
	GW/EDF50A								
	6.0V	3.34A	56g (1.98oz)	20.04w	2.79g/w (0.099oz/w)	9.00g	1.08g	16.7g	3.03g
	7.2V	4.20A	74g (2.61oz)	30.24w	2.45g/w (0.086oz/w)	Black	2030x3 Black/Orange	CN12-RLC	Black
	GW/EDF50B								
	6.0V	4.00A	61g (2.15oz)	24.00w	2.54g/w (0.090oz/w)	9.00g	1.25g	16.7g	3.03g
	7.2V	4.90A	78g (2.75oz)	35.28w	2.21g/w (0.078oz/w)	Black	2030x5 Black/Orange	CN12-RLC	Black
	GW/EDF50H								
	9.6V	1.35A	53g (1.87oz)	12.96w	4.09g/w (0.144oz/w)	9.00g	1.08g	16.7g	3.03g
	10.8V	1.50A	63g (2.22oz)	16.20w	3.89g/w (0.137oz/w)	Black	2020x3 Black/Orange	CN12-RXC	Black
	GW/EDF50AH								
	9.6V	1.76A	59g (2.08oz)	16.90w	3.49g/w (0.123oz/w)	9.00g	1.08g	16.7g	3.03g
	10.8V	2.12A	70g (2.47oz)	22.90w	3.06g/w (0.108oz/w)	Black	2030x3 Black/Orange	CN12-RXC	Black
	GW/EDF50BH								
	9.6V	2.16A	64g (2.26oz)	20.74w	3.09g/w (0.109oz/w)	9.00g	1.25g	16.7g	3.03g
	10.8V	2.51A	77g (2.72oz)	27.11w	2.84g/w (0.100oz/w)	Black	2030x5 Black/Orange	CN12-RXC	Black
Tested without Intake Ring or Nacelle									
									
<ul style="list-style-type: none"> ● CN12 Shaft: Diameter = 1.5mm 									